

---

Stream: Internet Engineering Task Force (IETF)  
RFC: [9464](#)  
Category: Standards Track  
Published: November 2023  
ISSN: 2070-1721  
Authors: M. Boucadair   T. Reddy.K   D. Wing   V. Smyslov  
          *Orange*            *Nokia*            *Cloud Software Group*    *ELVIS-PLUS*

# RFC 9464

## Internet Key Exchange Protocol Version 2 (IKEv2) Configuration for Encrypted DNS

---

### Abstract

This document specifies new Internet Key Exchange Protocol Version 2 (IKEv2) Configuration Payload Attribute Types to assign DNS resolvers that support encrypted DNS protocols, such as DNS over HTTPS (DoH), DNS over TLS (DoT), and DNS over QUIC (DoQ).

### Status of This Memo

This is an Internet Standards Track document.

This document is a product of the Internet Engineering Task Force (IETF). It represents the consensus of the IETF community. It has received public review and has been approved for publication by the Internet Engineering Steering Group (IESG). Further information on Internet Standards is available in Section 2 of RFC 7841.

Information about the current status of this document, any errata, and how to provide feedback on it may be obtained at <https://www.rfc-editor.org/info/rfc9464>.

### Copyright Notice

Copyright (c) 2023 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

## Table of Contents

1. Introduction	2
2. Terminology	3
3. IKEv2 Configuration Payload Attribute Types for Encrypted DNS	4
3.1. ENCDNS_IP* Configuration Payload Attributes	4
3.2. ENCDNS_DIGEST_INFO Configuration Payload Attribute	6
4. IKEv2 Protocol Exchange	8
5. Subject Public Key Info (SPKI) Hash	9
6. Security Considerations	10
7. Privacy Considerations	10
8. IANA Considerations	10
9. References	10
9.1. Normative References	10
9.2. Informative References	11
Appendix A. Configuration Payload Examples	12
A.1. Configuration of Encrypted IPv6 DNS Resolvers without Suggested Values	12
A.2. Configuration of Encrypted IPv6 DNS Resolvers with Suggested Values	13
A.3. Split DNS	14
Acknowledgments	15
Authors' Addresses	15

## 1. Introduction

This document specifies a mechanism for assigning encrypted DNS configurations to an Internet Key Exchange Protocol Version 2 (IKEv2) initiator [RFC7296]. Specifically, it assigns one or more Authentication Domain Names (ADNs) of DNS resolvers that support encrypted DNS protocols. The specific protocols supported are described using the Service Parameters format defined in [RFC9460]; supported protocols include DNS over HTTPS (DoH) [RFC8484], DNS over TLS (DoT) [RFC7858], and DNS over QUIC (DoQ) [RFC9250].

This document introduces three new IKEv2 Configuration Payload Attribute Types ([Section 3](#)) to add support for encrypted DNS resolvers. The ENCDNS\_IP4 and ENCDNS\_IP6 attribute types ([Section 3.1](#)) are used to provision ADNs, a list of IP addresses, and a set of service parameters. The ENCDNS\_DIGEST\_INFO attribute ([Section 3.2](#)) additionally allows a specific resolver certificate to be indicated by the IKEv2 responder.

The encrypted DNS resolver hosted by a Virtual Private Network (VPN) provider can get a domain-validated certificate from a public Certificate Authority (CA). The VPN client does not need to be provisioned with the root certificate of a private CA to authenticate the certificate of the encrypted DNS resolvers. The encrypted DNS resolver can run on private IP addresses, and its access can be restricted to clients connected to the VPN.

For many years, typical designs have often assumed that the DNS resolver was usually located inside the protected domain, but they don't consider implementations where the DNS resolver could be located outside of it. With encrypted DNS, implementing the latter scenario becomes plausible. Note that existing VPN client implementations might not expect the discovered DNS resolver IP addresses to be outside of the covered IP address ranges of the VPN tunnel.

## 2. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

This document uses the terms defined in [[RFC8499](#)].

Also, this document uses the terms defined in [[RFC7296](#)]. In particular, readers should be familiar with the terms "initiator" and "responder" as used in that document.

This document makes use of the following terms:

Do53: Refers to unencrypted DNS.

Encrypted DNS: Refers to a scheme where DNS messages are sent over an encrypted channel. Examples of encrypted DNS are DoT, DoH, and DoQ.

ENCDNS\_IP\*: Refers to any of the IKEv2 Configuration Payload Attribute Types defined in [Section 3.1](#).

### 3. IKEv2 Configuration Payload Attribute Types for Encrypted DNS

#### 3.1. ENCDNS\_IP\* Configuration Payload Attributes

The ENCDNS\_IP\* IKEv2 Configuration Payload Attribute Types, ENCDNS\_IP4 and ENCDNS\_IP6, are used to configure an initiator with encrypted DNS resolvers. Both attribute types share the format shown in [Figure 1](#). The information included in these attributes adheres to the recommendation in [Section 3.1.9](#) of [\[RFC9463\]](#).

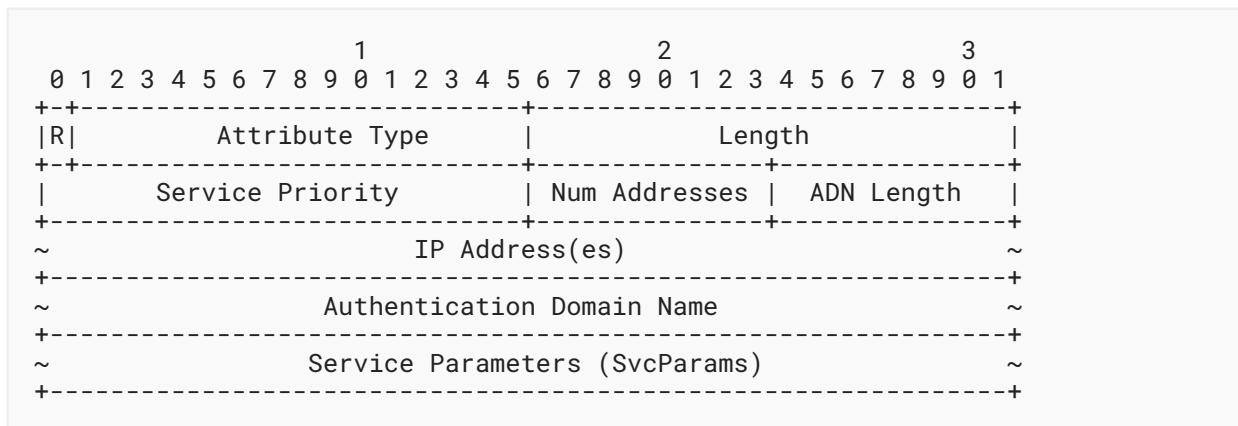


Figure 1: Format of ENCDNS\_IP4 and ENCDNS\_IP6 Configuration Attributes

The description of the fields shown in [Figure 1](#) is as follows:

**R (Reserved, 1 bit):** This bit **MUST** be set to zero and **MUST** be ignored on receipt (see [Section 3.15.1](#) of [\[RFC7296\]](#) for details).

**Attribute Type (15 bits):** Identifier for the Configuration Attribute Type. This is set to 27 for ENCDNS\_IP4 or 28 for ENCDNS\_IP6, as registered in [Section 8](#).

**Length (2 octets, unsigned integer):** Length of the enclosed data in octets. In particular, this field is set to:

- 0, if the Configuration payload has type (1) CFG\_REQUEST and no specific DNS resolver is requested or (2) CFG\_ACK. If the "Length" field is set to 0, then the subsequent fields shown in [Figure 1](#) are not present.
- $(4 + \text{'Length of the ADN'} + N * 4 + \text{'Length of SvcParams'})$  for ENCDNS\_IP4 attributes if the Configuration payload has type CFG\_REQUEST, CFG\_REPLY, or CFG\_SET, with N being the number of included IPv4 addresses ("Num Addresses").

- $(4 + \text{'Length of the ADN'} + N * 16 + \text{'Length of SvcParams'})$  for ENCDNS\_IP6 attributes if the Configuration payload has type CFG\_REQUEST, CFG\_REPLY, or CFG\_SET, with N being the number of included IPv6 addresses ("Num Addresses").

Service Priority (2 octets): The priority of this attribute compared to other ENCDNS\_IP\* instances. This 16-bit unsigned integer is interpreted following the rules specified in [Section 2.4.1](#) of [RFC9460]. As AliasMode ([Section 2.4.2](#) of [RFC9460]) is not supported, this field **MUST NOT** be set to 0. Note that AliasMode is not supported because such a mode will trigger additional Do53 queries while the data can be supplied directly in the IKE response.

Num Addresses (1 octet): Indicates the number of enclosed IPv4 (for ENCDNS\_IP4) or IPv6 (for ENCDNS\_IP6) addresses. This value **MUST NOT** be set to 0 if the Configuration payload has type CFG\_REPLY or CFG\_SET. This may be set to 0 in CFG\_REQUEST to indicate that no IP address is encoded in the attribute.

ADN Length (1 octet): Indicates the length of the "Authentication Domain Name" field in octets. When set to 0, this means that no ADN is enclosed in the attribute.

IP Address(es) (variable): Includes one or more IP addresses that can be used to reach the encrypted DNS resolver identified by the ADN. For ENCDNS\_IP4, this field contains one or more 4-octet IPv4 addresses, and for ENCDNS\_IP6, this field contains one or more 16-octet IPv6 addresses.

Authentication Domain Name (variable): A fully qualified domain name of the encrypted DNS resolver, in DNS presentation format and using an Internationalized Domain Names for Applications (IDNA) A-label [[RFC5890](#)]. The name **MUST NOT** contain any terminators (e.g., NULL, CR).

An example of a valid ADN for a DoH server is "doh1.example.com".

Service Parameters (SvcParams) (variable): Specifies a set of service parameters that are encoded following the same rules for encoding SvcParams using the wire format specified in [Section 2.2](#) of [RFC9460]. [Section 3.1.5](#) of [RFC9463] lists a set of service parameters that are recommended to be supported by implementations.

The service parameters **MUST NOT** include "ipv4hint" or "ipv6hint" SvcParams, as they are superseded by the included IP addresses.

If no "port" service parameter is included, this indicates that default port numbers should be used. As a reminder, the default port number is 853 for DoT ([Section 6](#) of [[RFC7858](#)]), 443 for DoH ([Section 8.1](#) of [[RFC8484](#)]), and 853 for DoQ ([Section 8](#) of [[RFC9250](#)]).

The service parameters apply to all IP addresses in the ENCDNS\_IP\* Configuration Payload Attribute.

### 3.2. ENCDNS\_DIGEST\_INFO Configuration Payload Attribute

The ENCDNS\_DIGEST\_INFO Configuration Payload Attribute (Figure 2) allows IKEv2 responders to specify a certificate digest that initiators can use when validating TLS connections to encrypted resolvers. This attribute can also be sent by the initiator to request specific hash algorithms for such digests.

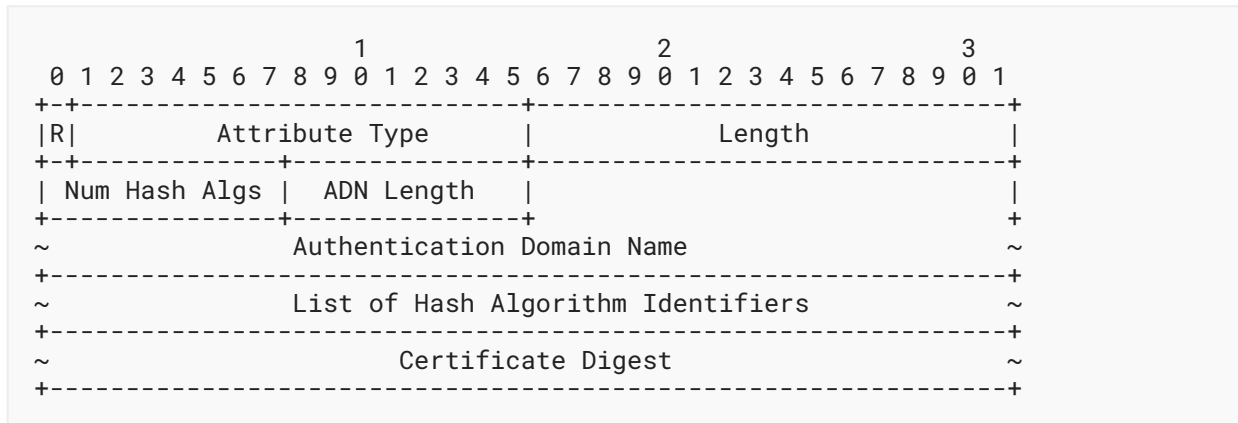


Figure 2: ENCDNS\_DIGEST\_INFO Attribute Format

Some of the fields shown in Figure 2 can be omitted, as further detailed below.

The format of the ENCDNS\_DIGEST\_INFO attribute if the Configuration payload has type CFG\_REQUEST is shown in Figure 3.

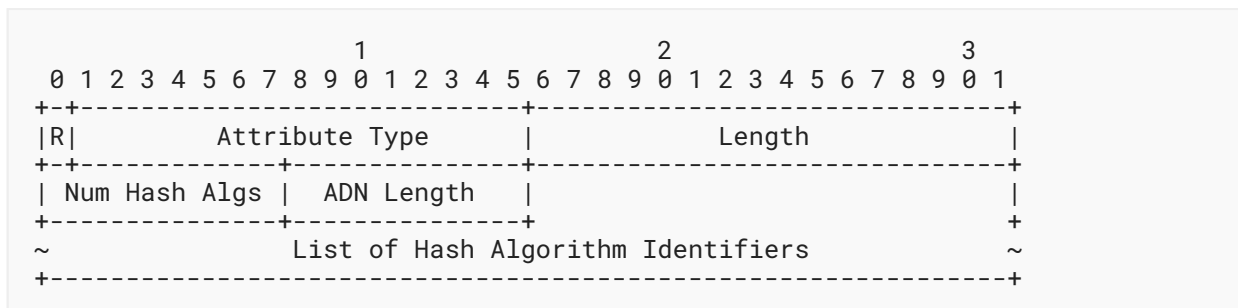


Figure 3: ENCDNS\_DIGEST\_INFO Attribute Format in CFG\_REQUEST

The description of the fields shown in Figure 3 is as follows:

R (Reserved, 1 bit): This bit **MUST** be set to zero and **MUST** be ignored on receipt (see Section 3.15.1 of [RFC7296] for details).

Attribute Type (15 bits): Identifier for the Configuration Attribute Type. This is set to 29; see Section 8.

Length (2 octets, unsigned integer): Length of the enclosed data in octets. This field **MUST** be set to "2 + (2 \* 'number of included hash algorithm identifiers')".

Num Hash Algs (1 octet): Indicates the number of identifiers included in the "List of Hash Algorithm Identifiers" field. This field **MUST** be set to "(Length - 2)/2".

ADN Length (1 octet): **MUST** be set to 0.

List of Hash Algorithm Identifiers (variable): Specifies a list of 16-bit hash algorithm identifiers that are supported by the encrypted DNS client. This list may be controlled by a local policy.

The values of this field are identifiers taken from "IKEv2 Hash Algorithms" on IANA's "Internet Key Exchange Version 2 (IKEv2) Parameters" registry [IANA-IKE-HASH].

There is no padding between the hash algorithm identifiers.

Note that SHA2-256 is mandatory to implement (see [Section 5](#)).

The format of the ENCDNS\_DIGEST\_INFO attribute if the Configuration payload has type CFG\_REPLY or CFG\_SET is shown in [Figure 4](#).

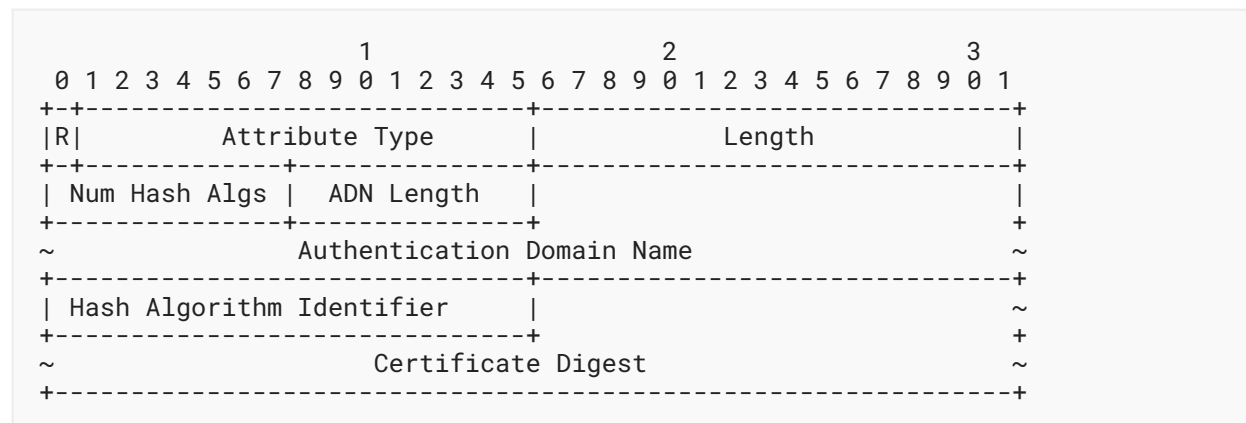


Figure 4: ENCDNS\_DIGEST\_INFO Attribute Format in CFG\_REPLY or CFG\_SET

The description of the fields shown in [Figure 4](#) is as follows:

R (Reserved, 1 bit): This bit **MUST** be set to zero and **MUST** be ignored on receipt (see [Section 3.15.1](#) of [RFC7296] for details).

Attribute Type (15 bits): Identifier for the Configuration Attribute Type. This is set to 29; see [Section 8](#).

Length (2 octets, unsigned integer): Length of the data in octets.

Num Hash Algs (1 octet): **MUST** be set to 1.

ADN Length (1 octet): Indicates the length of the "Authentication Domain Name" field in octets. When set to 0, this means that the digest applies on the ADN conveyed in the ENCDNS\_IP\* Configuration Payload Attribute.

Authentication Domain Name (variable): A fully qualified domain name of the encrypted DNS resolver following the syntax defined in [RFC5890]. The name **MUST NOT** contain any terminators (e.g., NULL, CR). A name is included only when multiple ADNs are included in the ENCDNS\_IP\* Configuration Payload Attribute.

Hash Algorithm Identifier (2 octets): Specifies the 16-bit hash algorithm identifier selected by the DNS resolver to generate the digest of its certificate.

Certificate Digest (variable): Includes the Subject Public Key Info (SPKI) hash (Section 5) of the encrypted DNS resolver certificate using the algorithm identified in the "Hash Algorithm Identifier" field. The length of this field is "Length - 4 - 'ADN Length'".

The ENCDNS\_DIGEST\_INFO attribute may be present in the Configuration payload of CFG\_ACK. In such a case, the ENCDNS\_DIGEST\_INFO **MUST** be returned with zero-length data.

As discussed in Section 3.15.1 of [RFC7296], there are no defined uses for the CFG\_SET/CFG\_ACK exchange. The use of the ENCDNS\_DIGEST\_INFO attribute for these messages is provided for completeness.

## 4. IKEv2 Protocol Exchange

This section describes how the attributes defined in Section 3 are used to configure an IKEv2 initiator with one or more encrypted DNS resolvers. As a reminder, badly formatted attributes or unacceptable fields are handled as per Section 2.21 of [RFC7296].

Initiators first indicate support for encrypted DNS by including ENCDNS\_IP\* attributes in their CFG\_REQUEST payloads. Responders supply encrypted DNS configuration by including ENCDNS\_IP\* attributes in their CFG\_REPLY payloads. Concretely:

- If the initiator supports encrypted DNS, it includes either or both of the ENCDNS\_IP4 and ENCDNS\_IP6 attributes in its CFG\_REQUEST. If the initiator does not want to request specific DNS resolvers, it sets the "Length" field to 0 for the attribute. For a given attribute type, the initiator **MAY** send either an empty attribute or a list of distinct suggested resolvers. The initiator **MAY** also include the ENCDNS\_DIGEST\_INFO attribute with a list of hash algorithms that are supported by the encrypted DNS client.
- If the request includes multiple bitwise identical attributes, only the first occurrence is processed, and the rest **SHOULD** be ignored by the responder. The responder **MAY** discard the full request if the count of repeated attributes exceeds an (implementation-specific) threshold.
- For each ENCDNS\_IP\* attribute from the CFG\_REQUEST, if the responder supports the corresponding address family, and absent any policy restrictions, the responder sends back one or more ENCDNS\_IP\* attributes in the CFG\_REPLY with an appropriate list of IP addresses, service parameters, and an ADN. The list of IP addresses **MUST** include at least one



IP address. The service parameters **SHOULD** include at least the "alpn" service parameter. The "alpn" service parameter may not be required in contexts such as a variant of DNS over the Constrained Application Protocol (CoAP) where the messages are encrypted using Object Security for Constrained RESTful Environments (OSCORE) [RFC8613].

- The responder **MAY** ignore suggested values from the initiator (if any). Multiple instances of the same ENCDNS\_IP\* attribute **MAY** be returned if distinct ADNs or service parameters need to be assigned to the initiator. In such instances, the different attributes can have matching or distinct IP addresses. These instances **MUST** be presented to a local DNS client following their service priority (i.e., a smaller service priority value indicates a higher preference).
- In addition, the responder **MAY** return the ENCDNS\_DIGEST\_INFO attribute to convey a digest of the certificate of the encrypted DNS and the identifier of the hash algorithm that is used to generate the digest.
- If the CFG\_REQUEST includes an ENCDNS\_IP\* attribute but the CFG\_REPLY does not include an ENCDNS\_IP\* attribute matching the requested address family, this is an indication that the requested address family is not supported by the responder or the responder is not configured to provide corresponding resolver addresses.
- If the initiator receives both ENCDNS\_IP\* and INTERNAL\_IP6\_DNS (or INTERNAL\_IP4\_DNS) attributes, it is **RECOMMENDED** that the initiator use the encrypted DNS resolvers.

The DNS client establishes an encrypted DNS session (e.g., DoT, DoH, or DoQ) with the address or addresses conveyed in ENCDNS\_IP\* and uses the mechanisms discussed in Section 8 of [RFC8310] to authenticate the DNS resolver certificate using the ADN conveyed in ENCDNS\_IP\*.

If the CFG\_REPLY includes an ENCDNS\_DIGEST\_INFO attribute, the client has to create an SPKI hash (Section 5) of the DNS resolver certificate received in the TLS handshake using the negotiated hash algorithm in the ENCDNS\_DIGEST\_INFO attribute. If the computed digest for an ADN matches the digest sent in the ENCDNS\_DIGEST\_INFO attribute, the encrypted DNS resolver certificate is successfully validated. If so, the client continues with the TLS connection as normal. Otherwise, the client **MUST** treat the resolver certificate validation failure as a non-recoverable error. This approach is similar to certificate usage PKIX-EE(1) with selector SPKI(1) as defined in [RFC7671], but without PKIX validation.

If the IPsec connection is a split-tunnel configuration and the initiator negotiated INTERNAL\_DNS\_DOMAIN as per [RFC8598], the DNS client resolves the internal names using ENCDNS\_IP\* DNS resolvers.

Note: [RFC8598] requires that the INTERNAL\_IP6\_DNS (or INTERNAL\_IP4\_DNS) attribute be present when INTERNAL\_DNS\_DOMAIN is included. This specification relaxes that constraint in the presence of ENCDNS\_IP\* attributes. That is, if ENCDNS\_IP\* attributes are supplied, responders are allowed to include INTERNAL\_DNS\_DOMAIN even in the absence of INTERNAL\_IP6\_DNS (or INTERNAL\_IP4\_DNS) attributes.

## 5. Subject Public Key Info (SPKI) Hash

The SPKI hash of the encrypted DNS resolver certificate is the output of a cryptographic hash algorithm whose input is the DER-encoded ASN.1 representation of the SPKI.

Implementations **MUST** support SHA2-256 [RFC6234].

## 6. Security Considerations

This document adheres to the security considerations defined in [RFC7296]. In particular, this document does not alter the trust that the initiator has placed on the DNS configuration provided by a responder.

Networks are susceptible to internal attacks as discussed in Section 3.2 of [INTERNET-THREAT-MODEL]. Hosting encrypted DNS resolvers even in the case of split-VPN configuration can minimize the attack vector (e.g., a compromised network device cannot monitor/modify DNS traffic). This specification describes a mechanism for restricting access to the DNS messages to only the parties that need to know.

If the IKEv2 responder has used the NULL Authentication method [RFC7619] to authenticate itself, the initiator **MUST NOT** use returned ENCDNS\_IP\* resolvers configuration unless the initiator is preconfigured, e.g., in the operating system or the application.

This specification does not extend the scope of accepting DNSSEC trust anchors beyond the usage guidelines defined in Section 6 of [RFC8598].

## 7. Privacy Considerations

As discussed in [RFC9076], the use of encrypted DNS does not reduce the data available in the DNS resolver. For example, the reader may refer to Section 8 of [RFC8484] or Section 7 of [RFC9250] for a discussion on specific privacy considerations for encrypted DNS.

## 8. IANA Considerations

IANA has assigned the following new IKEv2 Configuration Payload Attribute Types in the "IKEv2 Configuration Payload Attribute Types" namespace available at [IANA-IKE-CFG].

Value	Attribute Type	Multivalued	Length	Reference
27	ENCDNS_IP4	YES	0 or more	RFC 9464
28	ENCDNS_IP6	YES	0 or more	RFC 9464
29	ENCDNS_DIGEST_INFO	YES	0 or more	RFC 9464

Table 1

## 9. References

### 9.1. Normative References

- [IANA-IKE-HASH]** IANA, "IKEv2 Hash Algorithms", <<https://www.iana.org/assignments/ikev2-parameters/>>.
- [RFC2119]** Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC5890]** Klensin, J., "Internationalized Domain Names for Applications (IDNA): Definitions and Document Framework", RFC 5890, DOI 10.17487/RFC5890, August 2010, <<https://www.rfc-editor.org/info/rfc5890>>.
- [RFC6234]** Eastlake 3rd, D. and T. Hansen, "US Secure Hash Algorithms (SHA and SHA-based HMAC and HKDF)", RFC 6234, DOI 10.17487/RFC6234, May 2011, <<https://www.rfc-editor.org/info/rfc6234>>.
- [RFC7296]** Kaufman, C., Hoffman, P., Nir, Y., Eronen, P., and T. Kivinen, "Internet Key Exchange Protocol Version 2 (IKEv2)", STD 79, RFC 7296, DOI 10.17487/RFC7296, October 2014, <<https://www.rfc-editor.org/info/rfc7296>>.
- [RFC8174]** Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8310]** Dickinson, S., Gillmor, D., and T. Reddy, "Usage Profiles for DNS over TLS and DNS over DTLS", RFC 8310, DOI 10.17487/RFC8310, March 2018, <<https://www.rfc-editor.org/info/rfc8310>>.
- [RFC8598]** Pauly, T. and P. Wouters, "Split DNS Configuration for the Internet Key Exchange Protocol Version 2 (IKEv2)", RFC 8598, DOI 10.17487/RFC8598, May 2019, <<https://www.rfc-editor.org/info/rfc8598>>.
- [RFC9460]** Schwartz, B., Bishop, M., and E. Nygren, "Service Binding and Parameter Specification via the DNS (DNS SVCB and HTTPS Resource Records)", RFC 9460, DOI 10.17487/RFC9460, November 2023, <<https://www.rfc-editor.org/info/rfc9460>>.

## 9.2. Informative References

- [IANA-IKE-CFG]** IANA, "IKEv2 Configuration Payload Attribute Types", <<https://www.iana.org/assignments/ikev2-parameters/>>.
- [INTERNET-THREAT-MODEL]** Arkko, J. and S. Farrell, "Challenges and Changes in the Internet Threat Model", Work in Progress, Internet-Draft, draft-arkko-farrell-arch-model-t-04, 13 July 2020, <<https://datatracker.ietf.org/doc/html/draft-arkko-farrell-arch-model-t-04>>.
- [RFC7619]** Smyslov, V. and P. Wouters, "The NULL Authentication Method in the Internet Key Exchange Protocol Version 2 (IKEv2)", RFC 7619, DOI 10.17487/RFC7619, August 2015, <<https://www.rfc-editor.org/info/rfc7619>>.

- [RFC7671] Dukhovni, V. and W. Hardaker, "The DNS-Based Authentication of Named Entities (DANE) Protocol: Updates and Operational Guidance", RFC 7671, DOI 10.17487/RFC7671, October 2015, <<https://www.rfc-editor.org/info/rfc7671>>.
- [RFC7858] Hu, Z., Zhu, L., Heidemann, J., Mankin, A., Wessels, D., and P. Hoffman, "Specification for DNS over Transport Layer Security (TLS)", RFC 7858, DOI 10.17487/RFC7858, May 2016, <<https://www.rfc-editor.org/info/rfc7858>>.
- [RFC8484] Hoffman, P. and P. McManus, "DNS Queries over HTTPS (DoH)", RFC 8484, DOI 10.17487/RFC8484, October 2018, <<https://www.rfc-editor.org/info/rfc8484>>.
- [RFC8499] Hoffman, P., Sullivan, A., and K. Fujiwara, "DNS Terminology", BCP 219, RFC 8499, DOI 10.17487/RFC8499, January 2019, <<https://www.rfc-editor.org/info/rfc8499>>.
- [RFC8613] Selander, G., Mattsson, J., Palombini, F., and L. Seitz, "Object Security for Constrained RESTful Environments (OSCORE)", RFC 8613, DOI 10.17487/RFC8613, July 2019, <<https://www.rfc-editor.org/info/rfc8613>>.
- [RFC9076] Wicinski, T., Ed., "DNS Privacy Considerations", RFC 9076, DOI 10.17487/RFC9076, July 2021, <<https://www.rfc-editor.org/info/rfc9076>>.
- [RFC9250] Huitema, C., Dickinson, S., and A. Mankin, "DNS over Dedicated QUIC Connections", RFC 9250, DOI 10.17487/RFC9250, May 2022, <<https://www.rfc-editor.org/info/rfc9250>>.
- [RFC9463] Boucadair, M., Ed., Reddy, K. T., Ed., Wing, D., Cook, N., and T. Jensen, "DHCP and Router Advertisement Options for the Discovery of Network-designated Resolvers (DNR)", RFC 9463, DOI 10.17487/RFC9463, November 2023, <<https://www.rfc-editor.org/info/rfc9463>>.

## Appendix A. Configuration Payload Examples

### A.1. Configuration of Encrypted IPv6 DNS Resolvers without Suggested Values

Figure 5 depicts an example of a CFG\_REQUEST to request the configuration of IPv6 DNS resolvers without providing any suggested values. In this example, the initiator uses the ENCDNS\_DIGEST\_INFO attribute to indicate that the encrypted DNS client supports SHA2-256 (2), SHA2-384 (3), and SHA2-512 (4) hash algorithms for certificate digests. The label of these algorithms is taken from [IANA-IKE-HASH]. The use of INTERNAL\_IP6\_ADDRESS is explained in [RFC7296] and thus is not reiterated here.

```

CP(CFG_REQUEST) =
  INTERNAL_IP6_ADDRESS()
  INTERNAL_IP6_DNS()
  ENCDNS_IP6()
  ENCDNS_DIGEST_INFO(0, (SHA2-256, SHA2-384, SHA2-512))

```

Figure 5: Example of a CFG\_REQUEST

Figure 6 depicts an example of a CFG\_REPLY that can be sent by a responder as a response to the above CFG\_REQUEST. This response indicates the following information to identify the encrypted DNS resolver:

- Its service priority, which is 1.
- Its single (1) IPv6 address (2001:db8:99:88:77:66:55:44).
- Its ADN (doh.example.com). This ADN has a length of 15.
- Its supported HTTP version (h2).
- The relative form of the URI Template (/dns-query/{?dns}).
- The SPKI hash of the resolver's certificate using SHA2-256 (8b6e7a5971cc6bb0b4db5a71...).

```

CP(CFG_REPLY) =
  INTERNAL_IP6_ADDRESS(2001:db8:0:1:2:3:4:5/64)
  ENCDNS_IP6(1, 1, 15,
             (2001:db8:99:88:77:66:55:44),
             "doh.example.com",
             (alpn=h2 dohpath=/dns-query/{?dns}))
  ENCDNS_DIGEST_INFO(0, SHA2-256,
                     8b6e7a5971cc6bb0b4db5a71...)

```

Figure 6: Example of a CFG\_REPLY

In the example depicted in Figure 6, no ADN is included in the ENCDNS\_DIGEST\_INFO attribute because only one ADN is provided in the ENCDNS\_IP6 attribute. Identifying the encrypted resolver associated with the supplied digest is therefore unambiguous.

## A.2. Configuration of Encrypted IPv6 DNS Resolvers with Suggested Values

An initiator may provide suggested values in the CFG\_REQUEST when requesting an encrypted DNS resolver. For example, the initiator may:

- Indicate a preferred resolver that is identified by an IPv6 address (see Figure 7).

```

CP(CFG_REQUEST) =
INTERNAL_IP6_ADDRESS()
INTERNAL_IP6_DNS()
ENCDNS_IP6(1, 1, 0,
(2001:db8:99:88:77:66:55:44))

```

*Figure 7: Example of a CFG\_REQUEST with a Preferred Resolver Identified by Its IP Address*

- Indicate a preferred resolver that is identified by an ADN (see [Figure 8](#)).

```

CP(CFG_REQUEST) =
INTERNAL_IP6_ADDRESS()
INTERNAL_IP6_DNS()
ENCDNS_IP6(1, 0, 15, "doh.example.com")

```

*Figure 8: Example of a CFG\_REQUEST with a Preferred Resolver Identified by Its ADN*

- Indicate a preferred transport protocol (DoT, in the example depicted in [Figure 9](#)).

```

CP(CFG_REQUEST) =
INTERNAL_IP6_ADDRESS()
INTERNAL_IP6_DNS()
ENCDNS_IP6(1, 0, 0, (alpn=dot))

```

*Figure 9: Example of a CFG\_REQUEST with a Preferred Transport Protocol*

- or any combination thereof.

### A.3. Split DNS

An initiator may also indicate that it supports Split DNS by including the `INTERNAL_DNS_DOMAIN` attribute in a `CFG_REQUEST` as shown in [Figure 10](#). In this example, the initiator does not indicate any preference for the requested encrypted DNS server, nor does it indicate which DNS queries will be forwarded through the IPsec tunnel.

```

CP(CFG_REQUEST) =
INTERNAL_IP6_ADDRESS()
INTERNAL_IP6_DNS()
ENCDNS_IP6()
INTERNAL_DNS_DOMAIN()

```

*Figure 10: Example of a CFG\_REQUEST with Support for Split DNS*

Figure 11 shows an example of the responder's reply. Absent any prohibited local policy, the initiator uses the encrypted DNS server (doh.example.com) for any subsequent DNS queries for "example.com" and its subdomains.

```
CP(CFG_REPLY) =
  INTERNAL_IP6_ADDRESS(2001:db8:0:1:2:3:4:5/64)
  ENCDNS_IP6(1, 1, 15,
             (2001:db8:99:88:77:66:55:44),
             "doh.example.com",
             (alpn=h2 dohpath=/dns-query){?dns}))
  INTERNAL_DNS_DOMAIN(example.com)
```

Figure 11: Example of a CFG\_REPLY with INTERNAL\_DNS\_DOMAIN

## Acknowledgments

Many thanks to Yoav Nir, Christian Jacquenet, Paul Wouters, and Tommy Pauly for their reviews and comments.

Yoav and Paul suggested the use of one single attribute carrying both the name and an IP address instead of depending on the existing INTERNAL\_IP6\_DNS and INTERNAL\_IP4\_DNS attributes.

Thanks to Tero Kivinen for the Shepherd review and Roman Danyliw for the AD review.

Thanks to Stewart Bryant for the gen-art review, Dhruv Dhody for the ops-dir review, and Patrick Mevzek for the dns-dir review.

Thanks to Paul Wouters, Zaheduzzaman Sarker, Éric Vyncke, and Robert Wilton for their comments during the IESG review.

## Authors' Addresses

### Mohamed Boucadair

Orange  
35000 Rennes  
France  
Email: [mohamed.boucadair@orange.com](mailto:mohamed.boucadair@orange.com)

### Tirumaleswar Reddy.K

Nokia  
India  
Email: [kondtir@gmail.com](mailto:kondtir@gmail.com)

**Dan Wing**

Cloud Software Group Holdings, Inc.

United States of America

Email: [dwing-ietf@fuggles.com](mailto:dwing-ietf@fuggles.com)**Valery Smyslov**

ELVIS-PLUS

Russian Federation

Email: [svan@elvis.ru](mailto:svan@elvis.ru)