

ENDIAGRAM

VO.1a 2012/08/20

Easy creation of potential energy curve diagrams.

Clemens NIEDERBERGER

<https://bitbucket.org/cgnieder/ENdiagram/>
contact@mychemistry.eu

English documentation

Contents

1	Licence and Requirements	2	6.2	Customization	16
2	Caveat	2	6.3	Debugging Information	19
3	Before We Start	2	7	The Activation Energy	19
4	The Curve – \ENcurve	3	7.1	The \ShowEa Command . . .	19
4.1	Properties	4	7.2	Choose Level Explicitly . . .	20
4.1.1	Scaling	4	7.3	Customization	21
4.1.2	Influencing the position relative to the axes	5	7.4	Debugging Information	22
4.1.3	Increment between the levels	6	8	Several Curves in one Diagram	23
4.1.4	The shape	8	9	Usage of TikZ	25
4.1.5	Ending minima	8	9.1	The Origin	26
4.1.6	TikZ style	9	10	Axes Ticks and Labels	27
4.2	The Axes	9	10.1	Automatic Ticks	27
4.3	Debugging Information	12	10.2	The \AddAxisLabel Command	27
5	The Levels	13	10.3	Customization	29
5.1	The \ShowNiveaus Command	13	11	Actual Values	30
5.2	Customization	13	11.1	The Basics	30
5.3	Choose Levels Explicitly . . .	14	11.2	Impact on Other Commands .	32
6	The Energy Gain	15	12	Example	34
6.1	The \ShowGain Command . .	15	References		36
			Index		37

1 Licence and Requirements

Permission is granted to copy, distribute and/or modify this software under the terms of the LaTeX Project Public License, version 1.3 or later (<http://www.latex-project.org/lppl.txt>). This package has the status “maintained.”

ENDIAGRAM needs the `l3kernel`¹ and the package `xparse`.² `xparse` is part of the `l3packages`³ bundle. **ENDIAGRAM** also needs **TikZ**⁴ and `siunitx`.⁵

Basic knowledge of **TikZ/pgf** [Tan] is recommended.

2 Caveat

This package is in an experimental state. There is lots of code to clean up and there are many loose ends to be tied together until I’ll be satisfied to publish this package as stable. However, as the unofficial release on my blog has gotten quite some interest⁶ I decided to publish this experimental version on the Comprehensive T_EX Archive Network (CTAN) nonetheless.

If you detect any bugs – and I guess you will – please write me a short email with a minimal working example (MWE) showing the undesired behaviour or report on issue on <https://www.bitbucket.org/cgnieder/endiagram>.

3 Before We Start

This document presents commands and options in a consistent way:

- ▶ `\begin{environment}[<options>] ... \end{environment}`
- ▶ `\command[<options>]{<arg>}`
- ▶ `option = default|value` → choice option with a default value that will be used, if the option is set without value.
- ▶ `option = <type>` → option that needs an input of a certain type.

`command` ▶ `option = <type>` → option that belongs to the module `command`.

Options can be used in the `[<options>]` arguments. There are two kinds of options: choice options where you can choose one of the values separated with `|`; an underlined value is a default value that is used, if no value is given. The others need a value of a certain type like a number (`<num>`), arbitrary input (`<text>`), **TikZ** options (`<tikz>`) etc..

As a rule commands are only defined inside the `\begin{endiagram} \end{endiagram}` environment.

Options can also be set up with this command:

- ▶ `\ENsetup[<module>]{<options>}`

¹ CTAN: `l3kernel` ² CTAN: `xparse` ³ CTAN: `l3packages` ⁴ CTAN: **TikZ** ⁵ CTAN: `siunitx` ⁶ ≥ 400 downloads

```

1 \ENsetup{option1 = value1, option2 = value2}
2 \ENsetup{module/option = value}
3 \ENsetup[module]{option = value}

```

Options that belong to a module are specific to a command. The command `\command` they belong to can *only* have the options marked with `command` in his argument [`<options>`].

All other options can also be set globally as package options. These are options which do *not* belong to a module like for example the `draft` option (see page 12):

```

1 \usepackage[draft]{endiagram}

```

4 The Curve – `\ENcurve`

The potential energy curves are drawn inside the `\begin{endiagram} ... \end{endiagram}` environment using the command `\ENcurve`.


- `\begin{endiagram}[<options>] \end{endiagram}`
- `\ENcurve[<options>]{<level1>,<level2>,<level3>}`

The command needs a comma separated list of relative energy levels. `\ENcurve{1,4,0}` means the maximum is four times higher above the end level than the starting level.

```

1 \begin{endiagram}
2 \ENcurve{1,4,0}
3 \end{endiagram}

```




`\ENcurve` can read any number of values but needs *at least three*. Less values will cause an error.

```

1 \begin{endiagram}
2 \ENcurve{1,5,2.5,4,0}
3 \end{endiagram}
4 \quad
5 \begin{endiagram}[scale=.7]
6 \ENcurve{1,7,2.5,6,3,4,0}
7 \end{endiagram}

```

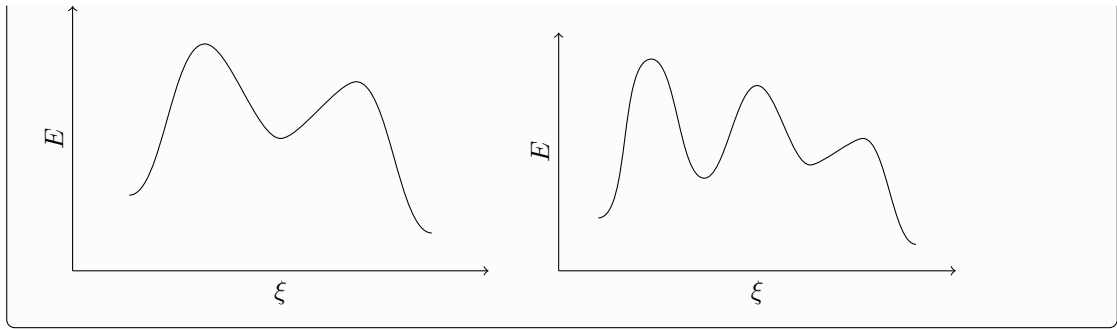

4.1 Properties


4.1.1 Scaling

Values given to `\ENcurve` are multiples of `ENDIAGRAM`'s standard unit (su). As a default it is set to 0.5 cm but can be changed using an option. There are other ways to influence the size of the diagram, too.


► `unit = <length>` Default: .5cm
 The standard unit for `\ENcurve` and some other commands. This document refers to it with su.

► `scale = <factor>` Default: 1

A changed su:

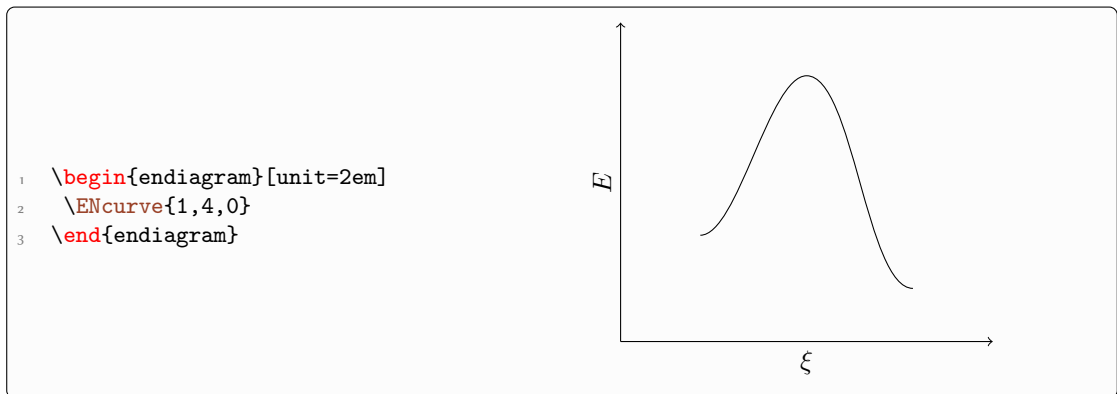

Scaled by the factor 1.5:

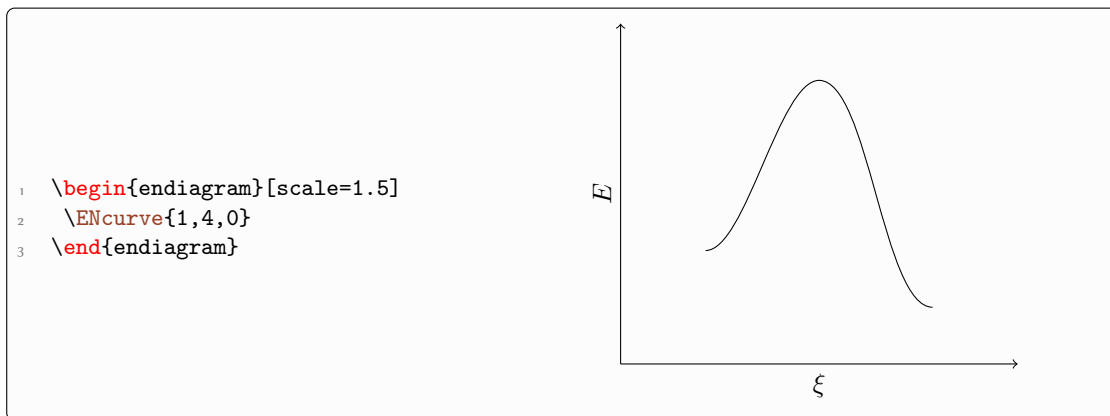

4.1.2 Influencing the position relative to the axes

The offset options control the length and position of the horizontal axis relative to the curve.

- **offset** = <num>

<num> is a multiple of the sU (see page 4).

Default: 0
- **r-offset** = <num>


<num> is a multiple of the sU.

Default: 0
- **l-offset** = <num>


<num> is a multiple of the sU.

Default: 0


The default behaviour for comparison:

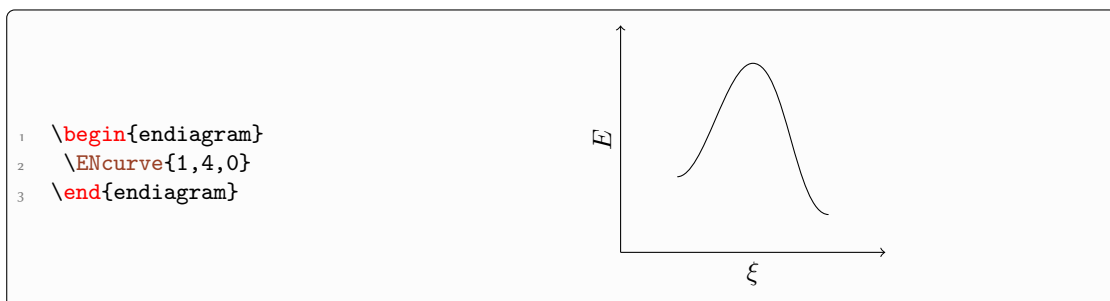


l-offset controls the distance of the start of the x axis to the start of the curve:

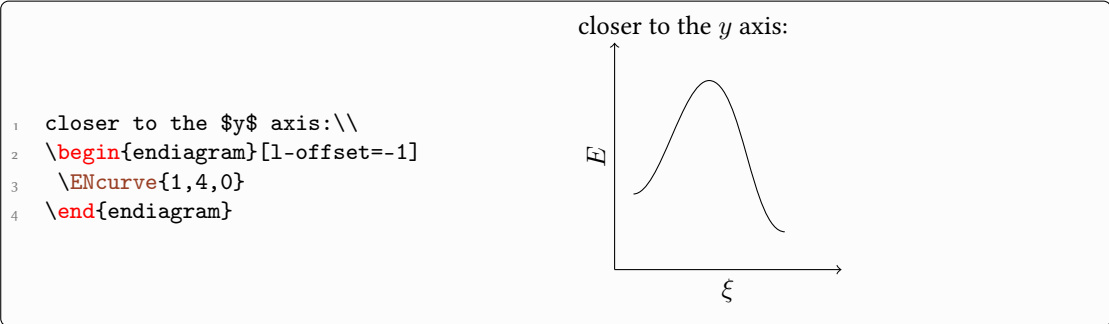

`r-offset` controls the “protruding” of the x axis after the curve:

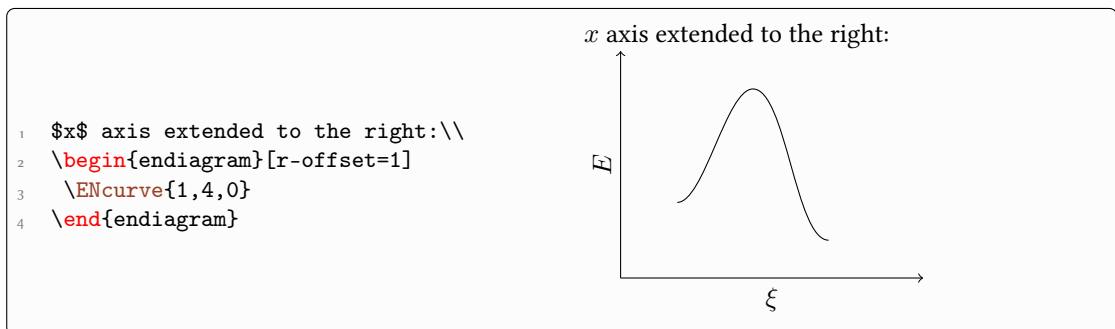

`offset` changes both values equally:

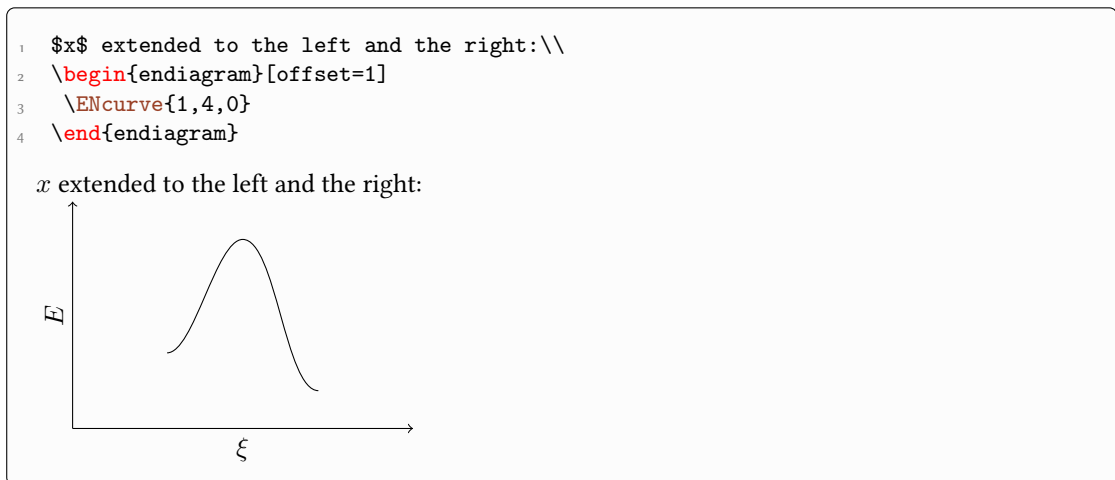

4.1.3 Increment between the levels


With the option

`ENCurve` ► `step` = <num>

Default: 2

<num> is a multiple of the `sv` (see page 4).


the default increment between the levels can be changed.

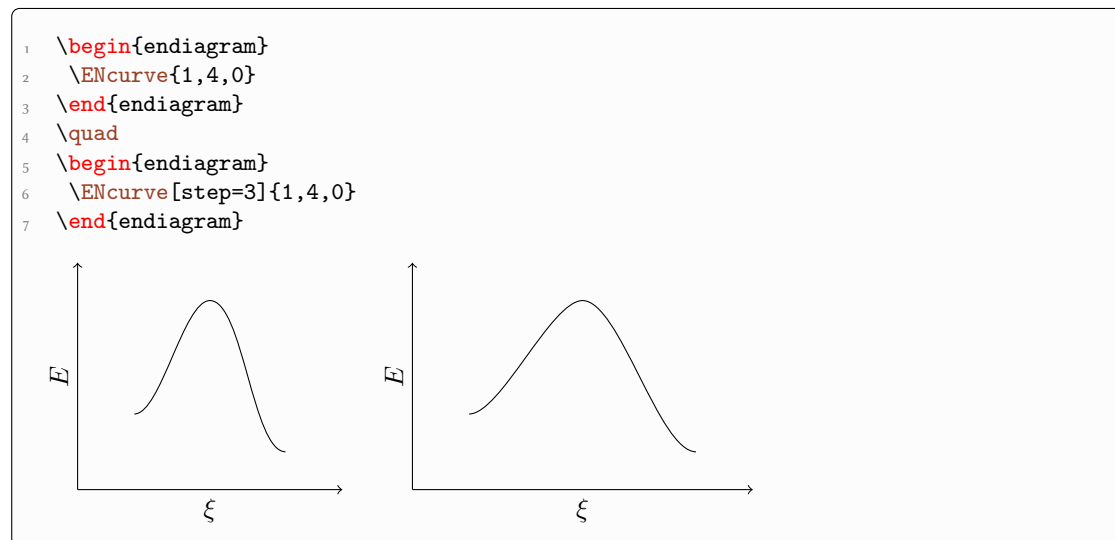

Sometimes a certain level should be shifted against the others. This is possible using an optional argument to the value of that level:

► `\ENCurve{<level>[<offset>],...}`

[<offset>] is a multiple of the su (see page 4) and is set to 0 as default. The level will be shifted to the right (positive values) or left (negative values).

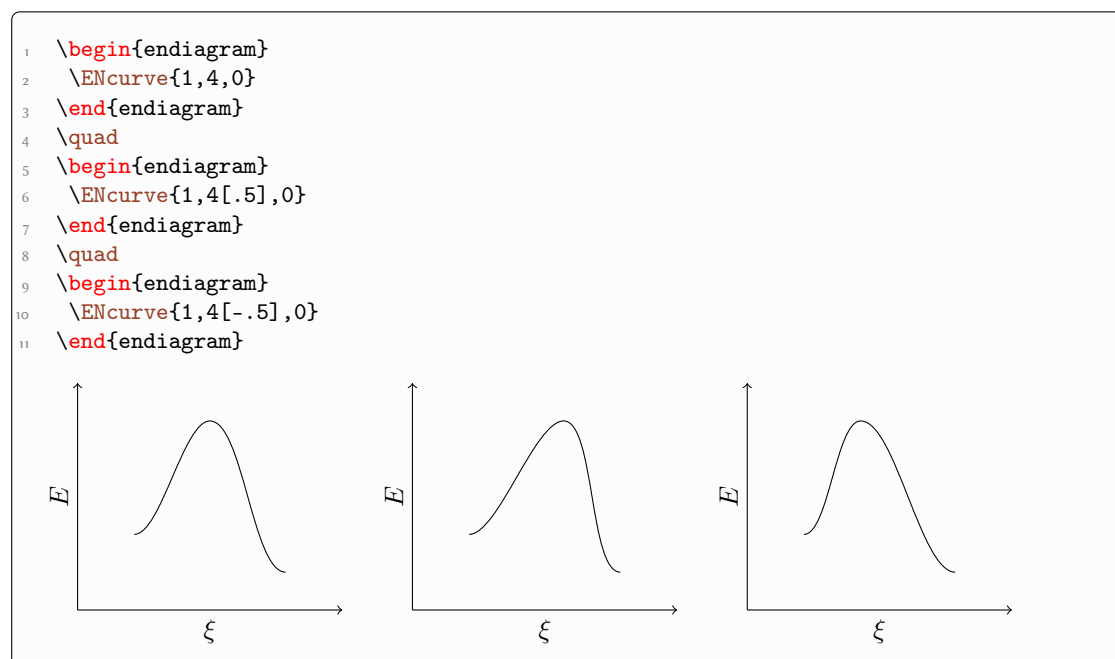

4.1.4 The shape


The option

`ENcurve` ► `looseness` = <value>

Default: .5

should be a number between 0 and 1.

changes the shape of the curve.

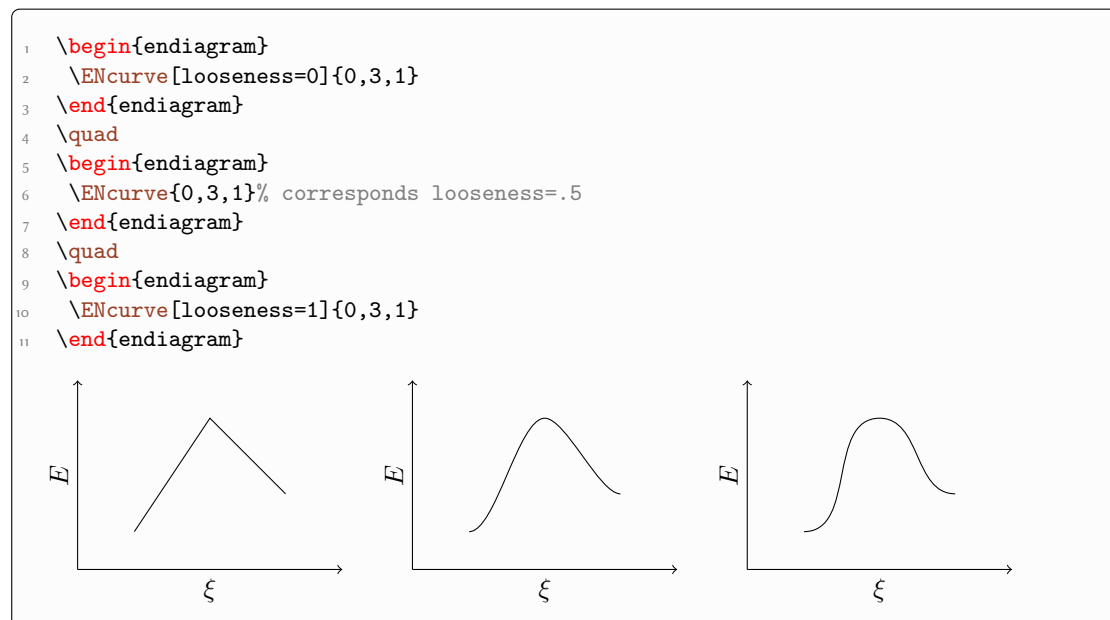


4.1.5 Ending minima

Sometimes potential energy curves are drawn with local minima at the start and the end of the curve. The option

`ENcurve` ► `minima` = `true`|`false`

Default: `false`


en- or disables them:

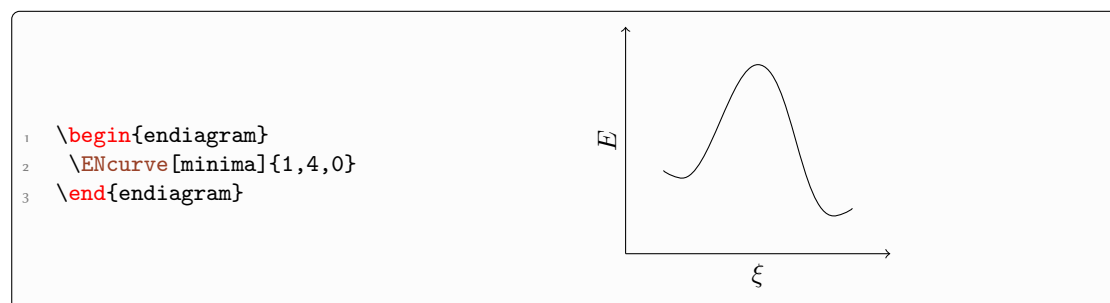

4.1.6 TikZ style

The style of the curve can be changed using TikZ options:

`ENcurve` ▶ `tikz = <tikz>` (initially empty)
Valid are options that can be used with `\draw`.

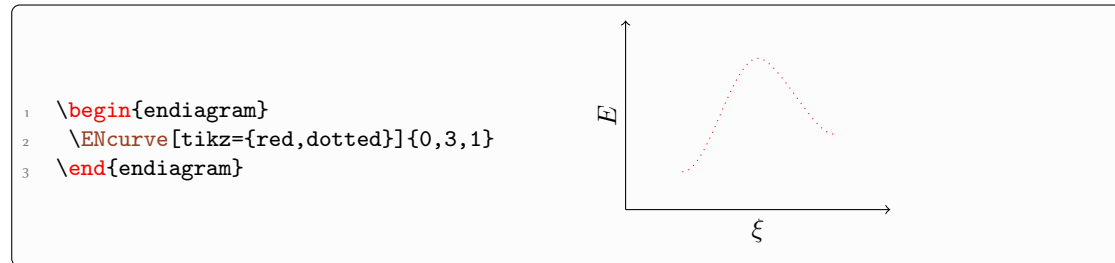

4.2 The Axes

There are also possibilities to customize the axes.

- ▶ `axes = xy|y-l|y-r|x|all|false` Default: `xy`
Number and type of axes.
- ▶ `x-axis = <tikz>` (initially empty)
TikZ options to the x axis.
- ▶ `y-axis = <tikz>` (initially empty)
TikZ options to the y axis.
- ▶ `x-label = below|right` Default: `below`
Position of the x axis label.
- ▶ `y-label = above|left` Default: `left`
Position of the y axis label.
- ▶ `x-label-pos = <value>` Default: `.5`
Position of the x axis label when `x-label = below` is set.
- ▶ `y-label-pos = <value>` Default: `.5`
Position of the y axis label when `y-label = left` is set.
- ▶ `x-label-offset = <length>` Default: `0pt`
Distance between label and x axis.
- ▶ `y-label-offset = <length>` Default: `0pt`
Distance between label and y axis.
- ▶ `x-label-angle = <angle>` Default: `0`
Angle which rotates the x axis label counter clockwise.


► `y-label-angle` = <angle> Default: 0
 Angle which rotates the y axis label counter clockwise.

► `x-label-text` = <text> Default: ξ
 x axis label.

► `y-label-text` = <text> Default: E
 y axis label.


No axes:

```
1 \begin{endiagram}[axes=false]
2   \ENCurve{1,4,0}
3 \end{endiagram}
```




All axes:

```
1 \begin{endiagram}[axes=all]
2   \ENCurve{1,4,0}
3 \end{endiagram}
```



Only the x axis:

```
1 \begin{endiagram}[axes=x]
2   \ENCurve{1,4,0}
3 \end{endiagram}
```




Changed labels:


```
1 \begin{endiagram}[x-label-text=\footnotesize reaction coordinate]
2   \ENCurve{1,4,0}
3 \end{endiagram}
```




Different positions of the labels:

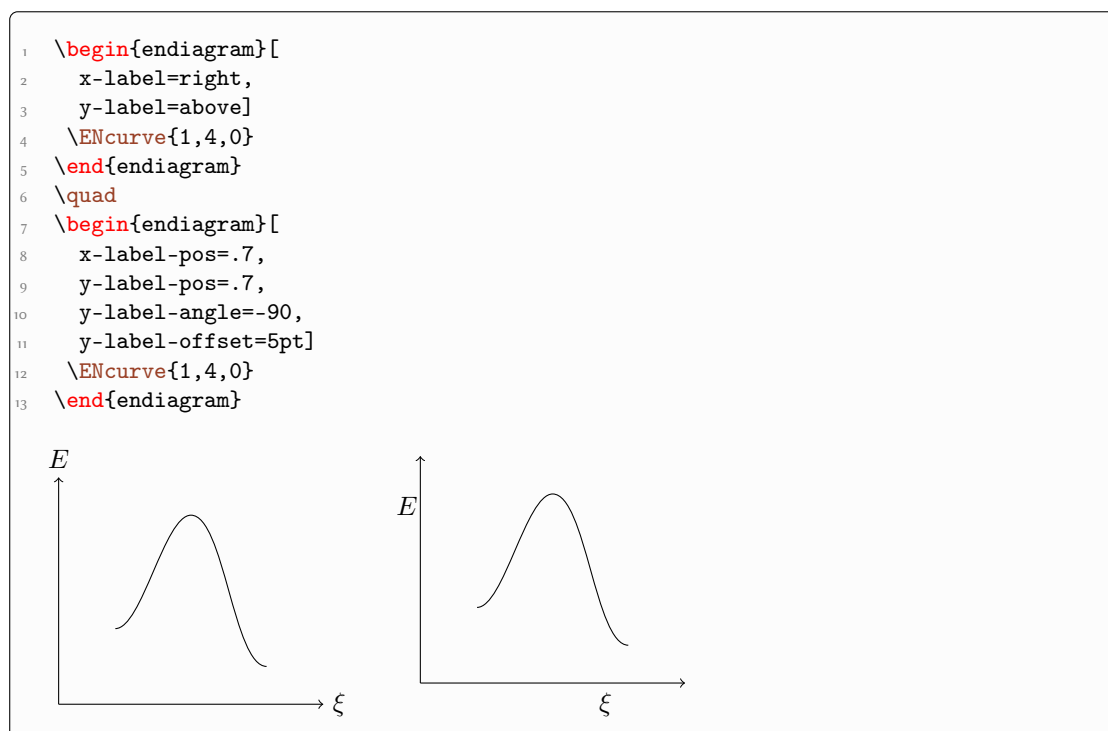

Crazy setup:




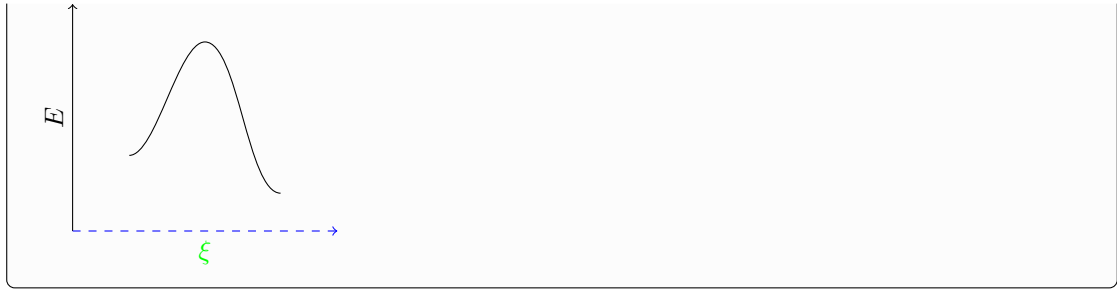

4.3 Debugging Information

For precise adjustments of details – particularly with the options and commands described in the next sections – some information is useful that is hidden normally. These options enable access:

- `debug` = `true|false` Default: `false`
- `draft` = `true|false` Default: `false`
 An Alias to `debug`.
- `final` = `true|false` Default: `true`
 The opposite of `draft`.

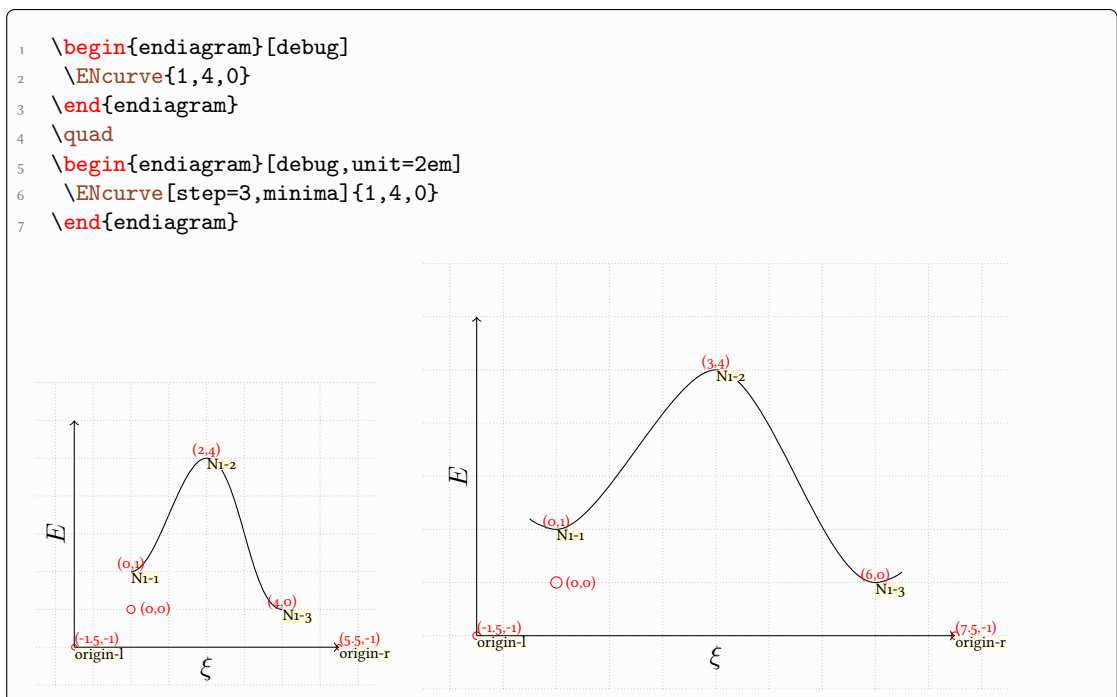

Shown are a grid, the origin and the coordinates and names of the levels. Depending on the commands you're using you get more information. It is described with the commands they belong to.


5 The Levels

5.1 The `\ShowNiveaus` Command

The command

► `\ShowNiveaus` [<options>]

draws horizontal lines to the levels:

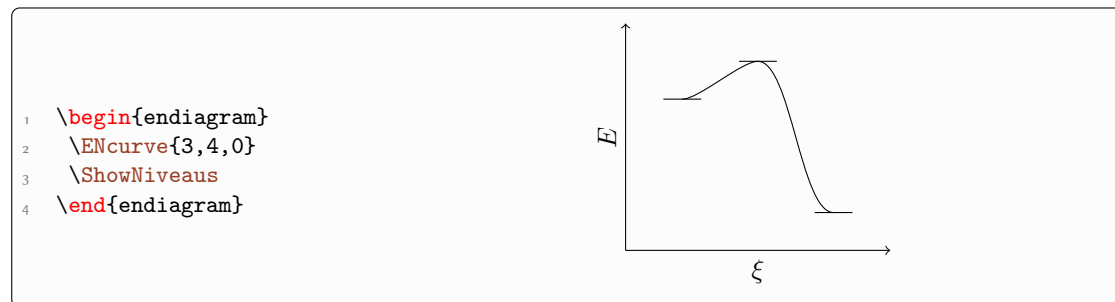

5.2 Customization

A number of options allow fine-tuning:

`ShowNiveaus` ► `length` = <num> Default: 1

The length of the lines. <num> is a multiple of the `su` (see page 4).


`ShowNiveaus` ► `shift` = <num> Default: 0

Shift to the right (positive values) or the left (negative values). <num> is a multiple of the `su`.

`ShowNiveaus` ► `tikz` = <tikz> (initially empty)

`TikZ` options to modify the style of the lines.

Longer lines:

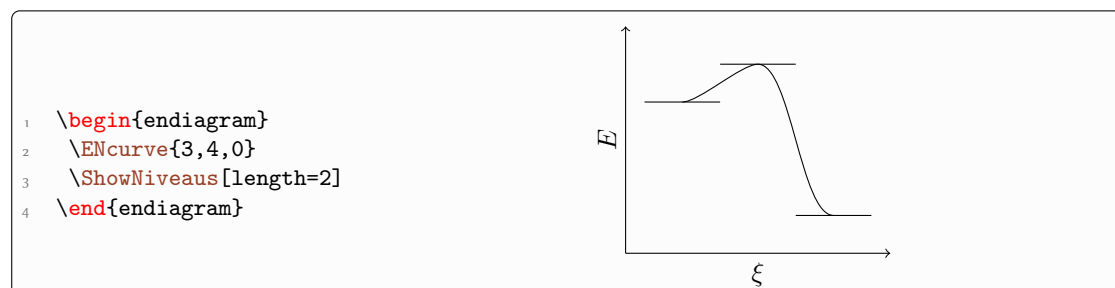


Without `shift` are centered to the extrema , i.e. they protrude by half of the value specified with `length`.

```

1 \begin{endiagram}
2   \ENCurve{3,4,0}
3   \ShowNiveaus[shift=.5]
4 \end{endiagram}
5 \quad
6 \begin{endiagram}
7   \ENCurve{3,4,0}
8   \ShowNiveaus[length=2,shift=1]
9 \end{endiagram}

```

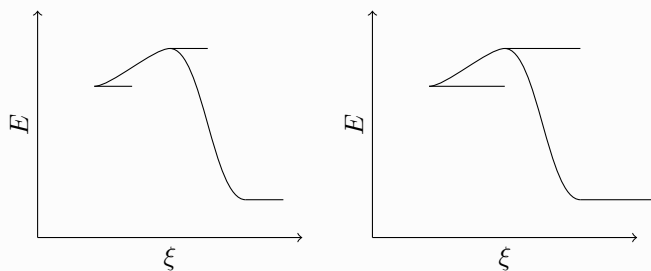

Maybe the examples in the next section will make it more clear why `shift` can be useful.

5.3 Choose Levels Explicitly

If you don't want to draw a line to every level you can use this option:

`ShowNiveaus ▶ niveau = <id1>,<id2>`


The `<id>` is the name of the level as shown by the `debug` option, see page 12.

The debug information helps in choosing the right level. The names of the levels follow the scheme N-`<number of curve>`-`<number of level>`.


```

1 \begin{endiagram}[debug]
2   \ENCurve{3,4,0}
3   \end{endiagram}
4 \quad
5 \begin{endiagram}
6   \ENCurve{3,4,0}
7   \ShowNiveaus[niveau=N1-2]
8 \end{endiagram}

```

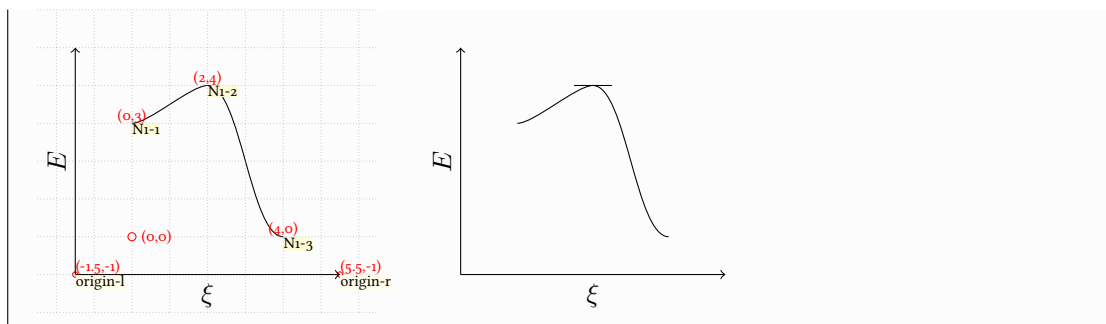

Every level can have a different color, length and shift:

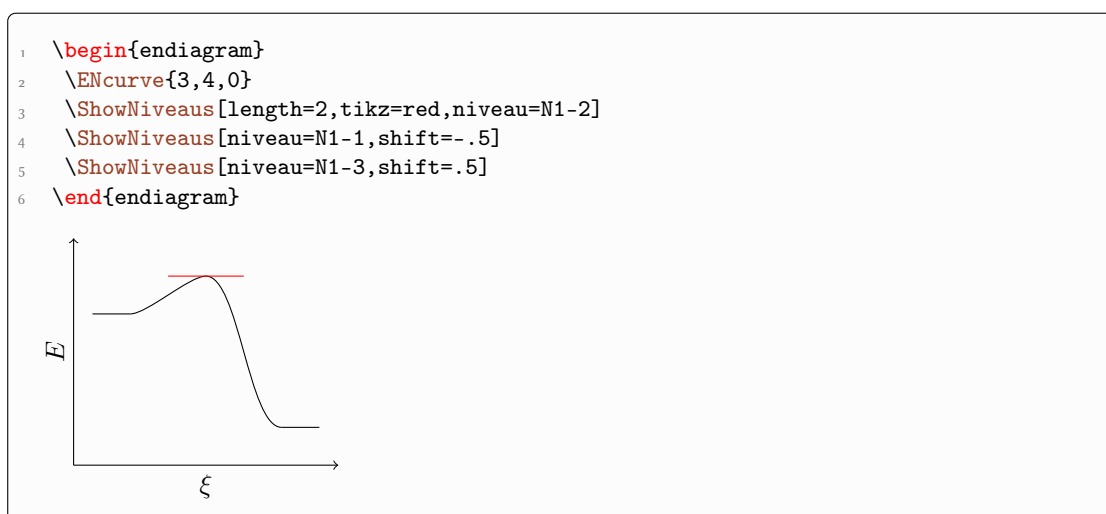

6 The Energy Gain

6.1 The `\ShowGain` Command

The command


► `\ShowGain[<options>]`

enables you to show the energy gain or loss of the reaction. It is always the difference between the first and the last level.

```

1 \begin{endiagram}
2 \ENCurve{3,4,0}
3 \ShowGain
4 \end{endiagram}

```



6.2 Customization

The command has options to modify the appearance.

ShowGain ▶ **tikz** = <tikz> Default: <->
 TikZ options for the vertical line.

ShowGain ▶ **connect** = <tikz> Default: dashed, help lines
 TikZ options for the connecting line.

ShowGain ▶ **connect-from-line** = true|false Default: false
 The connecting line starts either at the maximum/minimum or at the line drawn by **\ShowNiveaus**. This option works with the default values but otherwise can lead to unwanted results. To avoid that you can either set **\ShowGain** before **\ShowNiveaus** or you need to choose another way.

ShowGain ▶ **offset** = <num> Default: 0
 Shifts the vertical line to the right (positive value) or the left (negative value). <num> is a multiple of su (see page 4).

ShowGain ▶ **label** = true|false|<text> Default: false
 Use the default label (true) or an own label (<text>).

ShowGain ▶ **label-side** = right|left Default: right
 The side of the vertical line on which the label should be placed.

ShowGain ▶ **label-pos** = <value> Default: .5
 Position at the line. 0 means at the height of H_1 , i.e. the starting level, 1 means at the height of H_2 , i.e. the ending level.

ShowGain ▶ **label-tikz** = <tikz> (initially empty)
 TikZ options for the label.


```

1 \begin{endiagram}
2 \ENCurve{3,4,0}
3 \ShowGain[connect={dotted,red},offset=2]
4 \end{endiagram}

```




Using the `label` option:

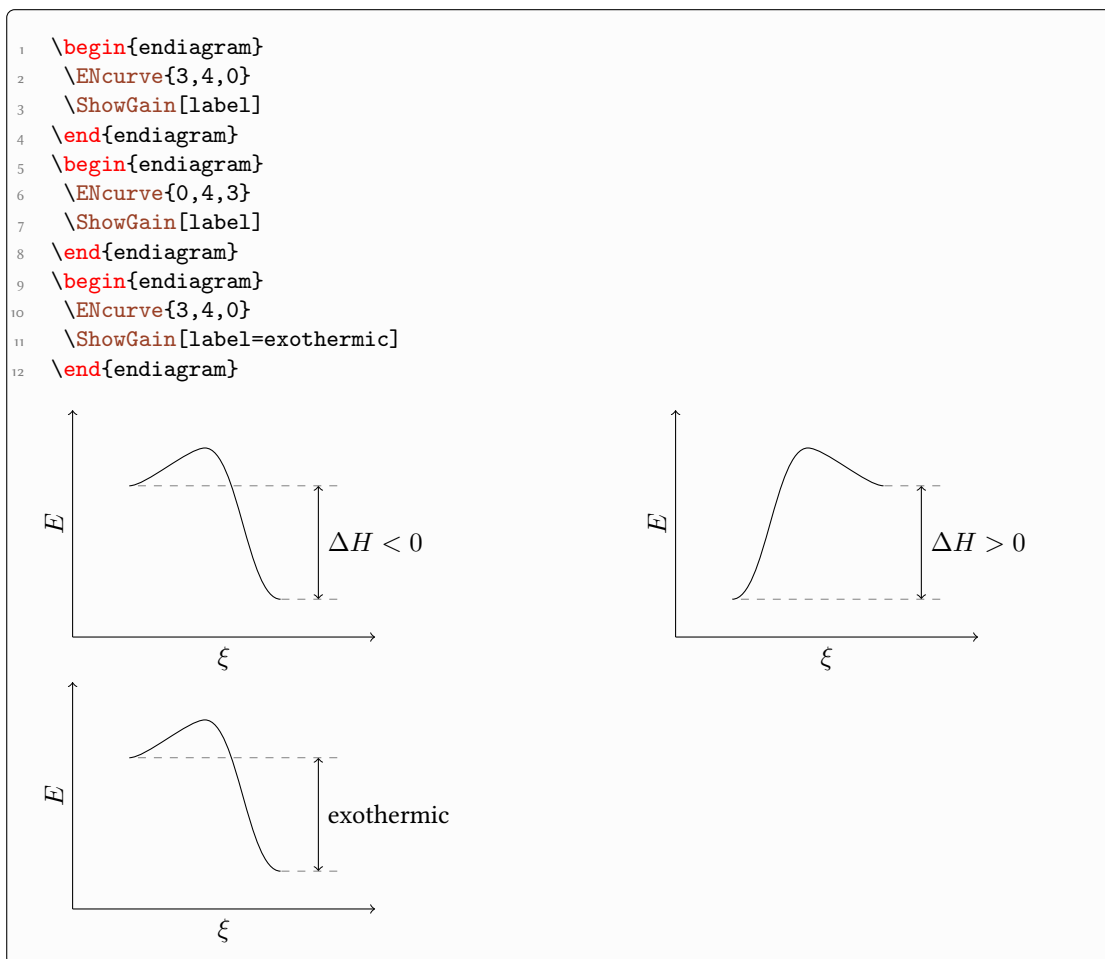


Connecting lines and levels are overlapping:

```

1 \begin{endiagram}
2 \ENCurve{3,4,0}
3 \ShowNiveaus
4 \ShowGain[connect=red]
5 \end{endiagram}

```




A possible solution:

```

1 \begin{endiagram}
2 \ENCurve{3,4,0}
3 \ShowNiveaus
4 \ShowGain[connect-from-line,connect=red]
5 \end{endiagram}

```




Better would be to set `\ShowNiveaus` after `\ShowGain`, particularly if you're not using the default settings.

```

1 \begin{endiagram}
2 \ENCurve{3,4,0}
3 \ShowNiveaus[niveau=N1-1]
4 \ShowGain[connect={red,dotted}]
5 \end{endiagram}
6 \begin{endiagram}
7 \ENCurve{3,4,0}
8 \ShowGain[connect={red,dotted}]
9 \ShowNiveaus[niveau=N1-1]
10 \end{endiagram}


```

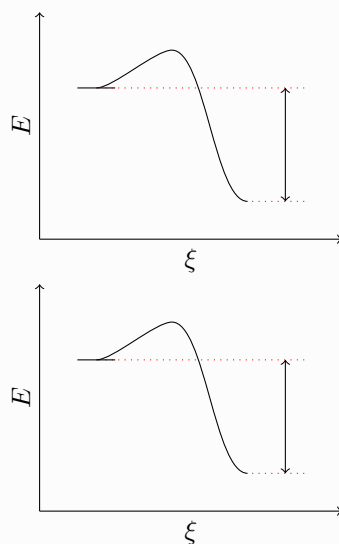

6.3 Debugging Information

Using the `debug` option (see page 12) gives you further information:

```
1 \begin{endiagram}[debug]
2 \ENCurve{3,4,0}
3 \ShowGain
4 \end{endiagram}
```

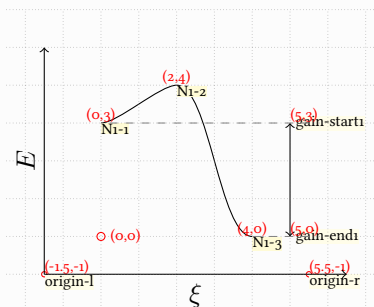

7 The Activation Energy


7.1 The `\ShowEa` Command

This command is similar to the commands `\ShowNiveaus` and `\ShowGain`.

► `\ShowEa`[<options>]


It enables to show the activation energy:

```
1 \begin{endiagram}
2 \ENCurve{2,4,0}
3 \ShowEa
4 \end{endiagram}
```




The default behaviour shows the difference between the *first* maximum after a *previous* minimum to that minimum:

```
1 \begin{endiagram}
2 \ENCurve{2,0,4}
3 \ShowEa
4 \end{endiagram}
```



This also holds if there is more than one maximum. How you choose a different one is described in the next section.

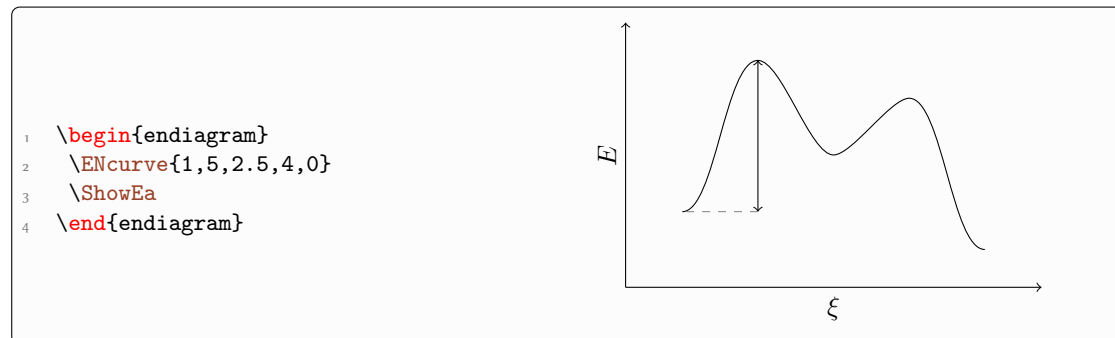


7.2 Choose Level Explicitly

The default behaviour is all right if there is only one maximum. If there are more one might want to choose a different one. The following options allow that.

ShowEa ▶ `max = first|all` Default: first
 Show the difference to the first maximum or to all maxima.

ShowEa ▶ `from = {(<coordinate1>)to(<coordinate2>)}`
 Specify the coordinates that should be connected. You can either use the coordinates (`<x>`, `<y>`) or the name (`<name>`) of the node.

Using `max = all`:

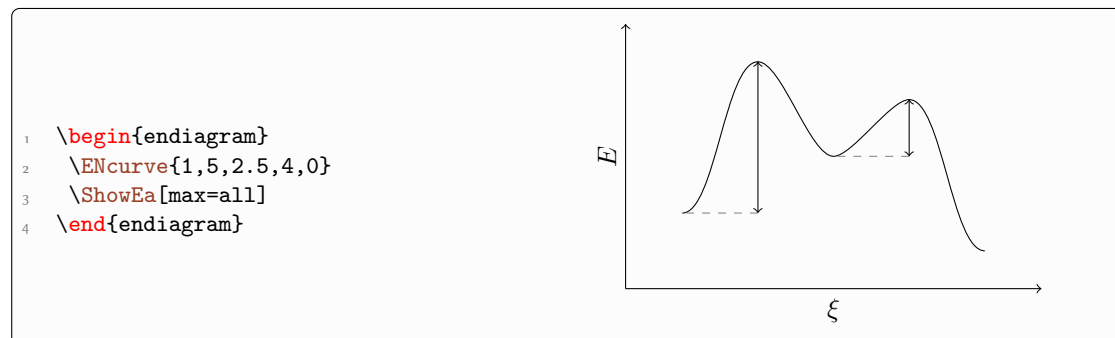


Since in most cases this won't be what you want you can specify the coordinates yourself. The option `debug` (see page 12) may help.

```

1 \begin{endiagram}[debug]
2 \ENCurve{1,5,2.5,4,0}
3 \ShowEa
4 \end{endiagram}
5 \quad
6 \begin{endiagram}
7 \ENCurve{1,5,2.5,4,0}
8 \ShowEa[from={(0,1) to (6,4)}]
9 \end{endiagram}
10
11 \begin{endiagram}
12 \ENCurve{1,5,2.5,4,0}
13 \ShowEa[from={(N1-1) to (N1-3)}]
14 \end{endiagram}
15 \quad
16 \begin{endiagram}
17 \ENCurve{1,5,2.5,4,0}
18 \ShowEa[from={(N1-5) to (N1-4)}]
19 \end{endiagram}

```

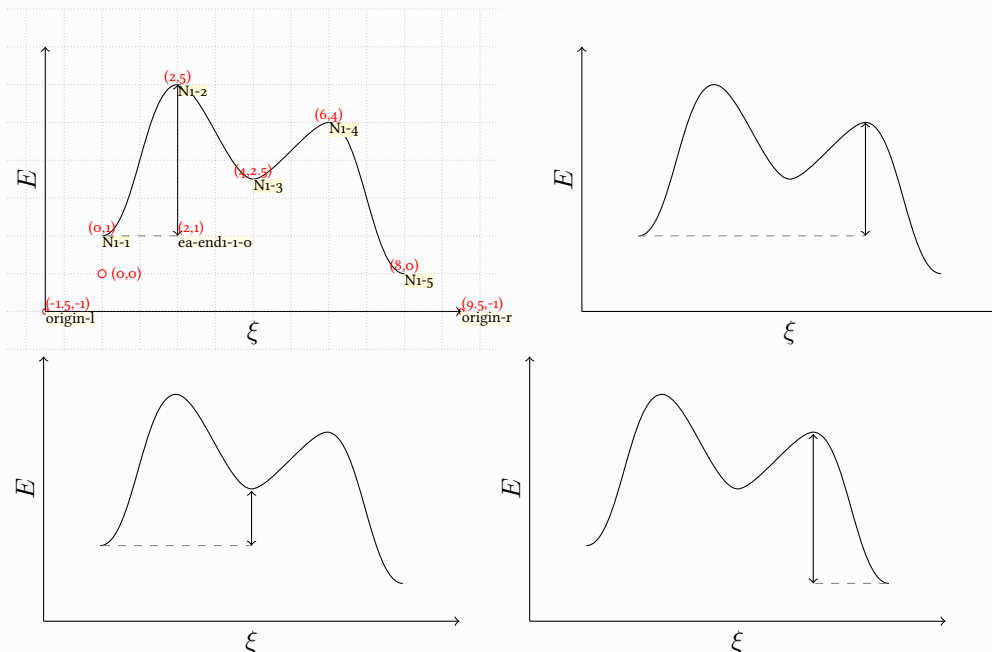

In every case the position of the vertical line is determined by the *first* coordinate.

7.3 Customization

Again there are a number of options to customize the appearance.

`ShowEa` ► `tikz` = <tikz>

Default: <->

TikZ options for the vertical line.



ShowEa ► **connect** = <tikz> Default: dashed,help lines
 TikZ options for the horizontal line.

ShowEa ► **label** = true|false|<text> Default: false
 Use the default label (E_a) or an own label.

ShowEa ► **label-side** = right|left Default: right
 The side of the vertical line where the label should appear.

ShowEa ► **label-pos** = <value> Default: .5
 Determines the vertical position of the label relative to the vertical line. 0 means at the lower end, 1 means at the upper end.

ShowEa ► **label-tikz** = <tikz> (initially empty)
 TikZ options for the label.

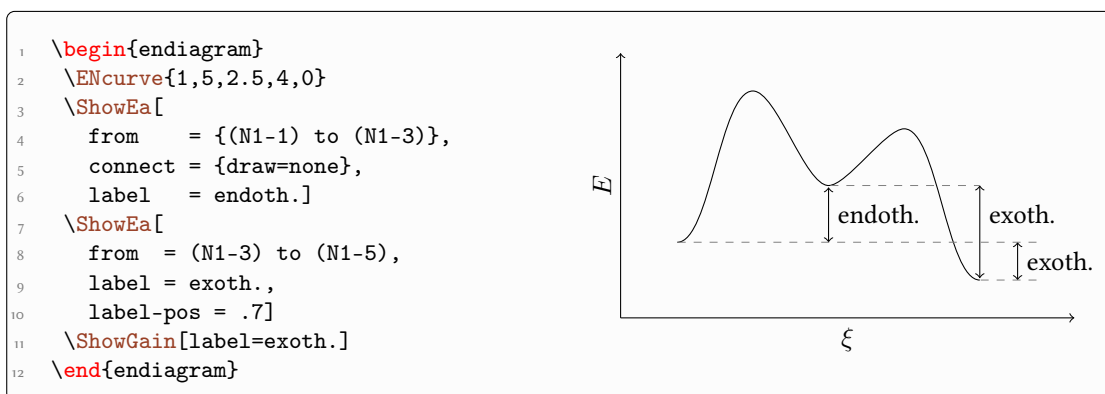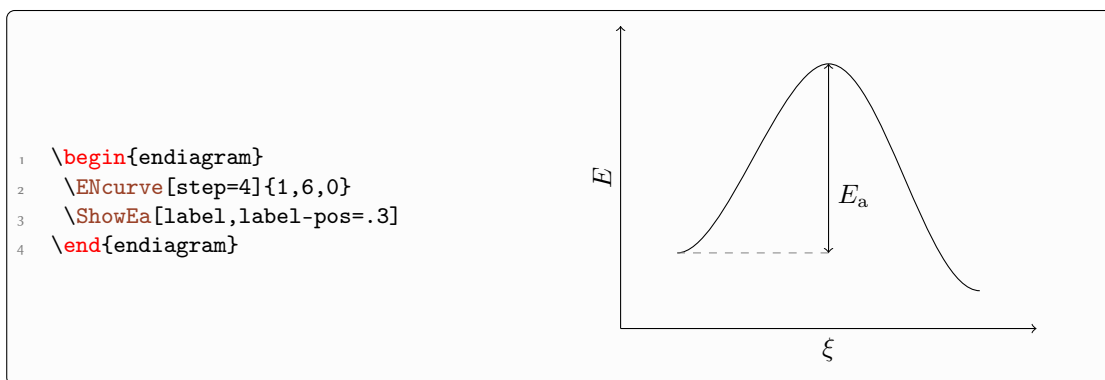


7.4 Debugging Information

The **debug** option gives you further information.

```

1 \begin{endiagram}[debug]
2 \ENCurve{1,5,2,3,0}
3 \ShowEa[max=all]
4 \end{endiagram}
5 \quad
6 \begin{endiagram}[debug]
7 \ENCurve{1,5,2,3,0}
8 \ShowEa[from={(0,1) to (6,3)}]
9 \end{endiagram}

```

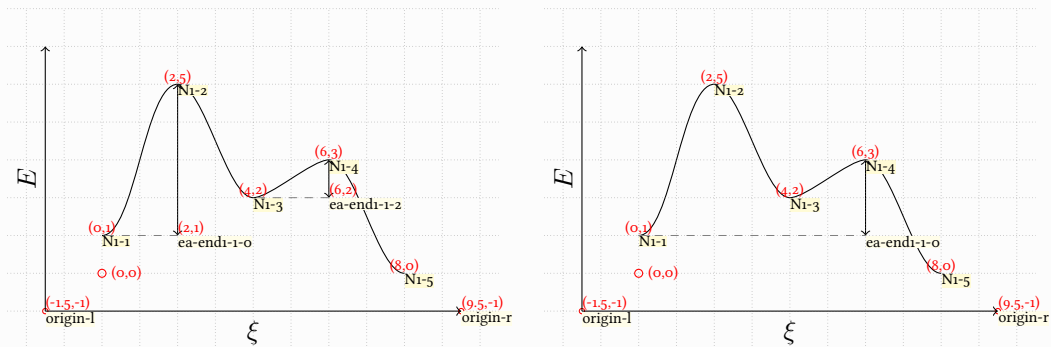


8 Several Curves in one Diagram

It's easy to draw several curves. You only need to use `\ENCurve` more than once.


```

1 \begin{endiagram}
2 \ENCurve[tikz=blue]{1,4,0}
3 \ENCurve[tikz=red]{1,2.5,0}
4 \draw[blue] (5,5) -- ++(1,0) node[black,right] {with enzyme};
5 \draw[red] (5,4) -- ++(1,0) node[black,right] {without enzyme};
6 \end{endiagram}


```

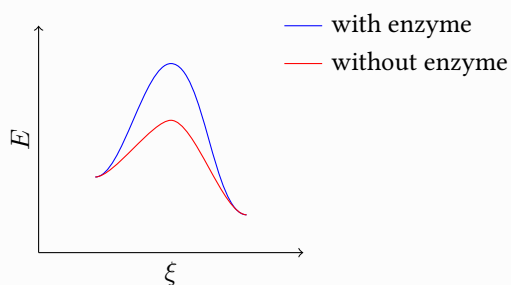

The commands `\ShowNiveaus`, `\ShowGain` and `\ShowEa` always relate to the curve set at last. This means you can use them selectively.

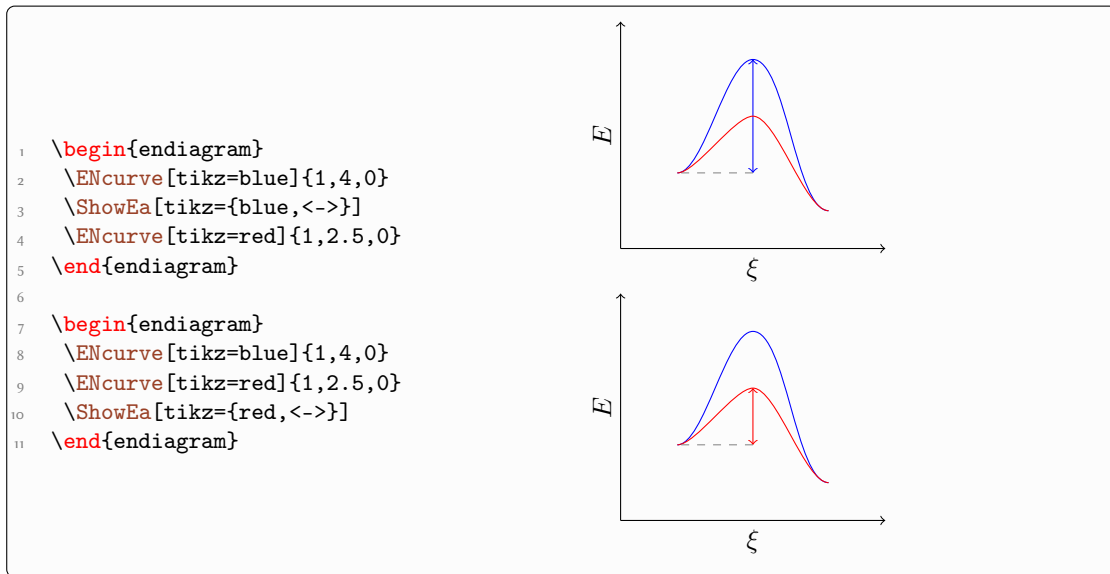

Using more than one curves explains the multiple numbering of the level names:

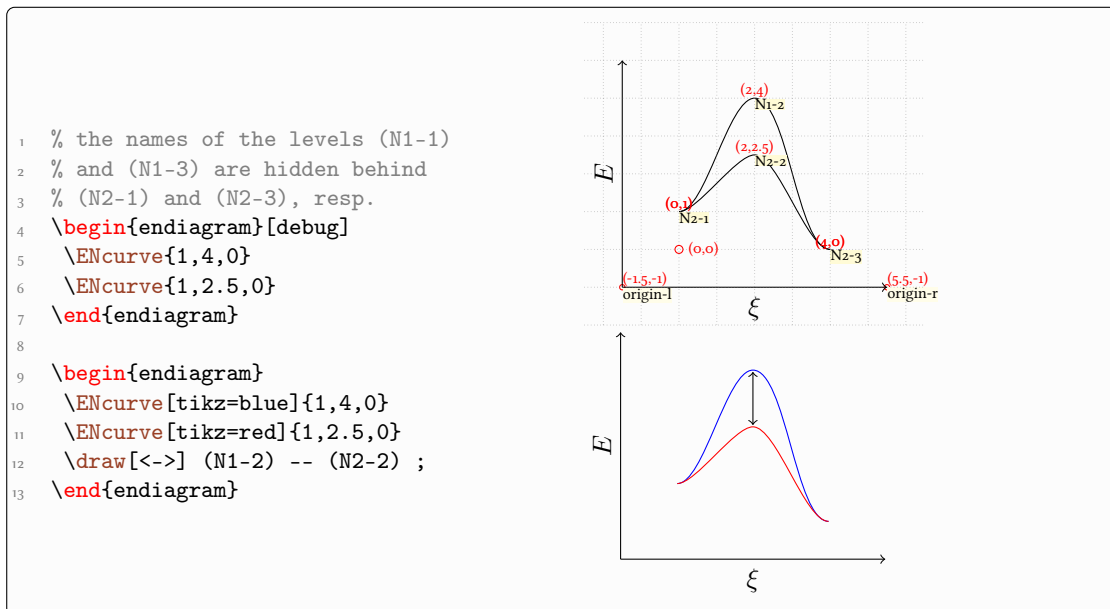


Of course it's possible to choose different options for different curves. This means you can use curves with a different number of maxima.


```

1 \begin{endiagram}
2 \ENCurve[step=4]{1,6,0}
3 \ENCurve[
4   tikz={densely dotted}]
5   {1,4[1],2.5,3[-1],0}
6 \end{endiagram}

```

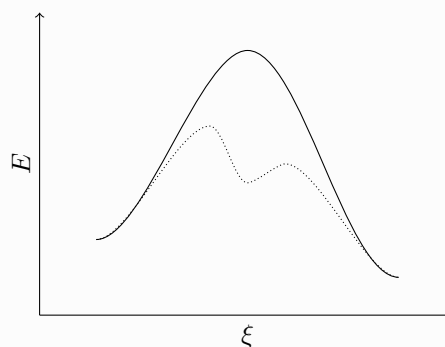



9 Usage of TikZ

Since the `\begin{endiagram} ... \end{endiagram}` environment only is a `tikzpicture` environment (well, more or less) you can use `TikZ` commands inside it. This means you can easily add additional information to the diagram.

```

1 % needs the package 'chemmacros'
2 \begin{endiagram}
3 \ENCurve{1,5,2,3,0}
4 \ShowNiveaus[length=2,niveau={N1-2,N1-3,N1-4}]
5 \node[above,xshift=4pt] at (N1-2) {\["UZ1"]$\sim$\transitionstatesymbol}$}
6 ;
7 \node[below] at (N1-3) {ZZ} ;
8 \node[above,xshift=4pt] at (N1-4) {\["UZ2"]$\sim$\transitionstatesymbol}$}
9 ;
10 \end{endiagram}
11 \quad
12 \begin{endiagram}
13 \ENCurve{2,3,0}
14 \draw[<-,red] (N1-2) -- ++(2,1) node[right] {transition state} ;
15 \end{endiagram}

```

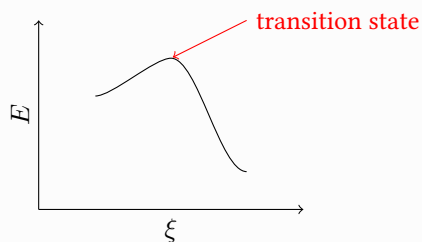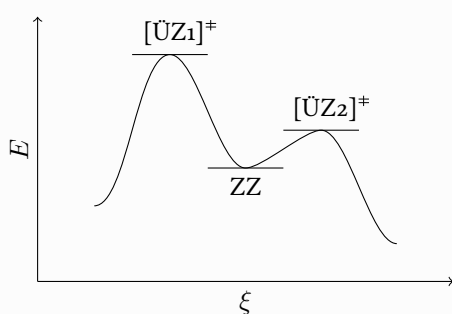


9.1 The Origin

The nodes (origin-l) and (origin-r) are set at the end of the environment. This means they are *not* available inside the `\begin{endiagram} ... \end{endiagram}` environment. If you want to use them you either need to look up their coordinates using the `debug` option (see page 12) ...

```

1 \begin{endiagram}[y-label=above]
2   \ENCurve{1,3[.5],0}
3   \draw[dashed,help lines]
4     (N1-2) -- (N1-2 -| -1.5,-1)
5     node[left,black] {max} ;
6 \end{endiagram}

```



... or use this option:


- `tikz = <tikz>` (initially empty)
TikZ options for the `\begin{endiagram} ... \end{endiagram}` environment.

With it you can pass arbitrary TikZ options to the internal `tikzpicture` environment.

```

1 \begin{endiagram}[
2   y-label = above,
3   tikz    = {remember picture}]
4   \ENCurve{1,3[.5],0}
5 \end{endiagram}
6 \tikz[remember picture,overlay]{
7   \draw[dashed,help lines]
8     (N1-2) -- (N1-2 -| origin-l)
9     node[left,black] {max} ;
10 }

```




There is an easier way, though: you can use the following command *after* drawing all curves:

- `\MakeOrigin`

```

1 \begin{endiagram}[y-label = above]
2   \ENCurve{1,3[.5],0}
3   \MakeOrigin
4   \draw[dashed,help lines]
5     (N1-2) -- (N1-2 -| origin-l)
6     node[left,black] {max} ;
7 \end{endiagram}

```




10 Axes Ticks and Labels

10.1 Automatic Ticks

The y axes can get ticks automatically.

- `ticks = y|y-l|y-r|none` Default: none
Adds ticks to the specified axes.
- `ticks-step = <num>` Default: 1
<num> is a multiple of the s.u. `ticks-step = 2` means that only every second tick is added.

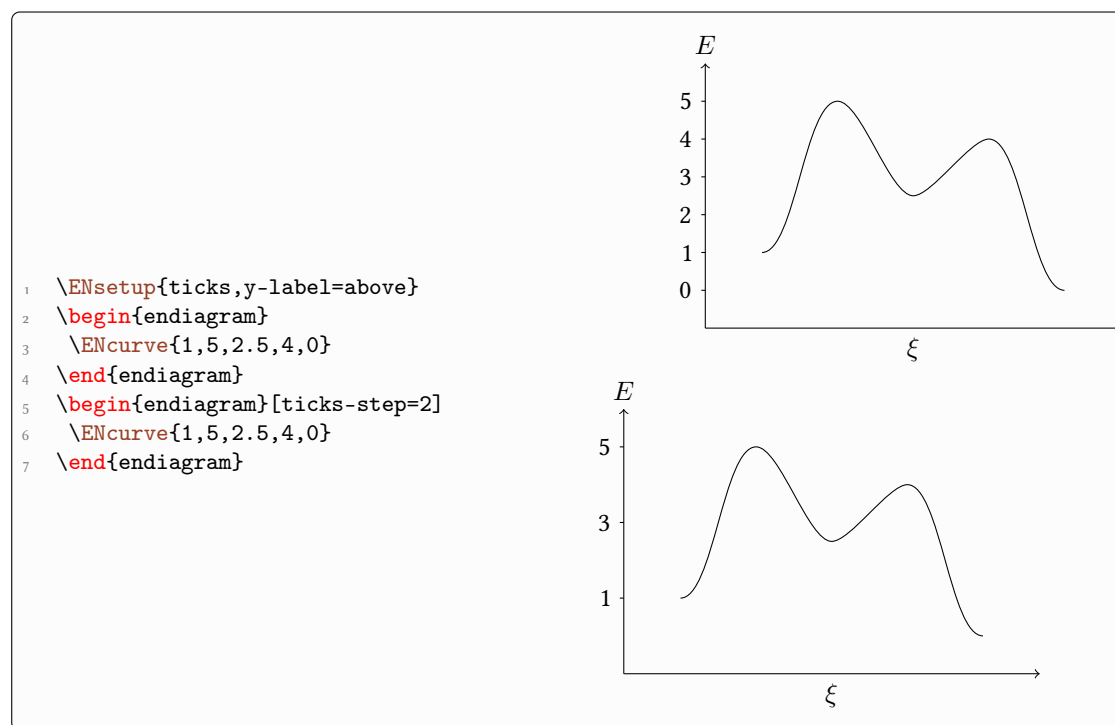

These ticks obey the `energy-unit` option, see section 11.

10.2 The `\AddAxisLabel` Command


To be able to add labels to the ticks there is the command

- `\AddAxisLabel[<options>]{(<point1>)[<opt. label>];(<point2>);...}`
- `\AddAxisLabel*[<options>]{<level1>[<opt. label>];<level2>;...}`


As you can see there are two variants. The first one awaits a list of coordinates in the **TikZ** sense. The second awaits y values. Every of these values has an optional argument with which you can specify the label.

The first variant also draws lines between the points specified and the y axis. Internally this command calls `\MakeOrigin`, see p. 26, which means it should be used *after* drawing all curves.

Example for the second variant:

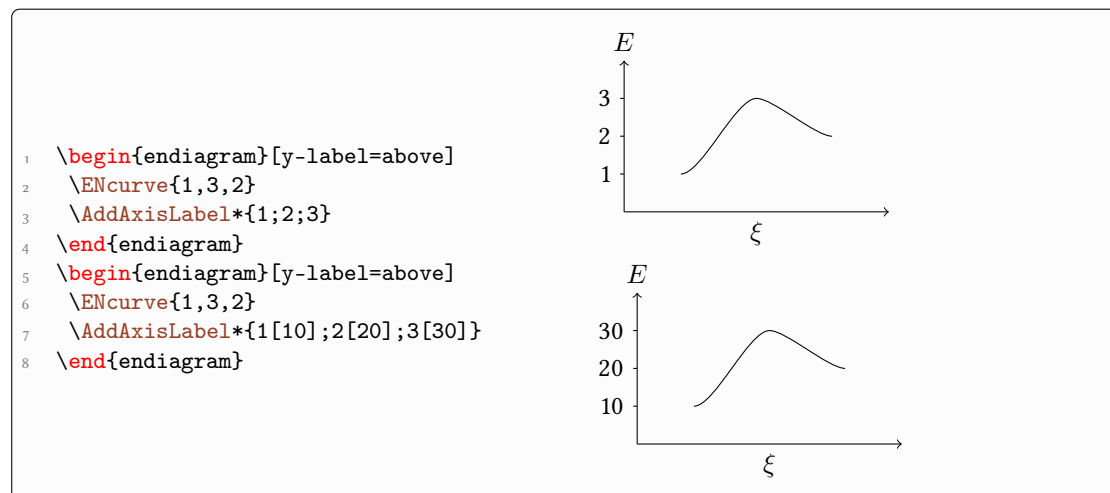

Example for the first variant:

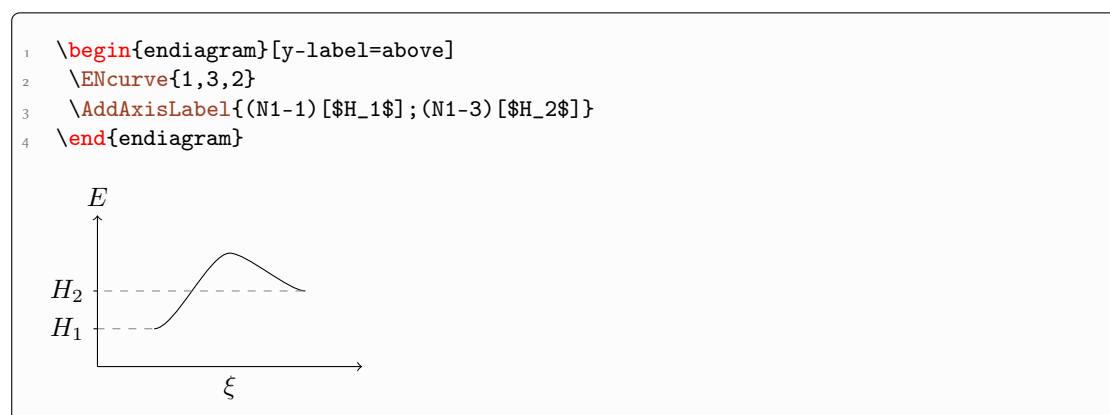


The optional arguments can also get **TikZ** options. The description should read:

- `\AddAxisLabel{(<point>)[<opt. label>,<tikz>]}`
- `\AddAxisLabel*{<level>[<opt. label>,<tikz>]}`

```

1 \begin{endiagram}[y-label=above]
2 \ENCurve{1,3,2}
3 \AddAxisLabel*{1[10];2[20,{draw,fill=green!15}];3[30]}
4 \end{endiagram}
5 \begin{endiagram}[y-label=above]
6 \ENCurve{1,3,2}
7 \AddAxisLabel{(N1-1)[$H_1$];(N1-3)[$H_2$, {draw,font=\color{red},fill=
  green!15}]}
8 \end{endiagram}

```

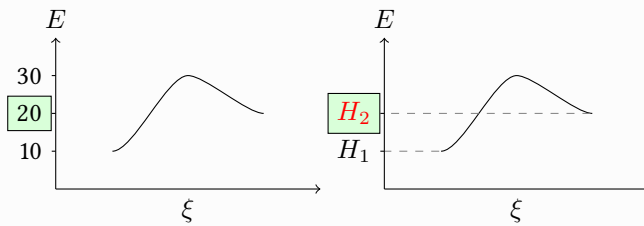

10.3 Customization

You have several options to customize the labels:

AddAxisLabel ► **axis** = y-l|y-r|x Default: y-l
 Choose which axis gets the labels.


AddAxisLabel ► **connect** = <tikz> Default: dashed,help lines
 Change the style of the lines.

AddAxisLabel ► **font** = <commands> (initially empty)
 You can add commands like `\footnotesize` and/or `\color{red}` to format the label text.

```

1 \begin{endiagram}[y-label=above]
2 \ENCurve{1,3,2}
3 \AddAxisLabel{(2,3) ["UZ"]}
4 \end{endiagram}
5 \begin{endiagram}[y-label=above,x-label=right]
6 \ENCurve{1,3,2}
7 \AddAxisLabel[axis=x,connect=dotted]{(2,3) ["UZ"]}
8 \end{endiagram}
9 \begin{endiagram}[axes=all,y-label=above]
10 \ENCurve{1,3,2}
11 \AddAxisLabel[axis=y-r,connect=red]{(2,3) ["UZ"]}
12 \end{endiagram}

```

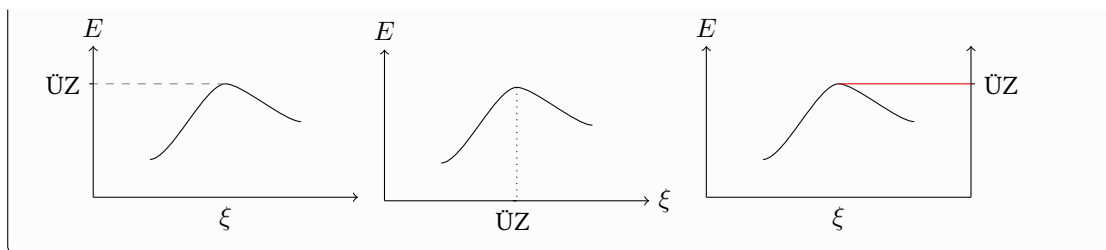

11 Actual Values

11.1 The Basics

If you want to have a more quantitative diagram or use actual values for the energies you can use these options:




- `energy-unit` = <unit> (initially empty)
The unit of the energy scale. A unit in the siunitx sense.
- `energy-step` = <num> Default: 1
Determines which increment on the energy scale corresponds to the su.
- `energy-zero` = <num> Default: 0
Shifts the origin of the energy scale by <num> in multiples of the energy scale.
- `energy-unit-separator` = <anything> Default: /
Separates the y axes label from the unit.
- `energy-round` = <num> Default: 3
Rounds the value to this number of figures.
- `energy-round-places` = `true|false` Default: `false`
Switch rounding mode to places.


Choosing a unit will add ticks and labels to the y axis automatically and has an impact on the commands `\ShowGain` and `\ShowEa`, see section 11.2.

```

1 \begin{endiagram}[ticks,y-label=above,energy-step=10]
2   \ENcurve{1,3,2}
3 \end{endiagram}
4 \begin{endiagram}[y-label=above,energy-step=10,energy-zero=30]
5   \ENcurve{1,3,2}
6   \AddAxisLabel*{1;2;3}
7 \end{endiagram}

```

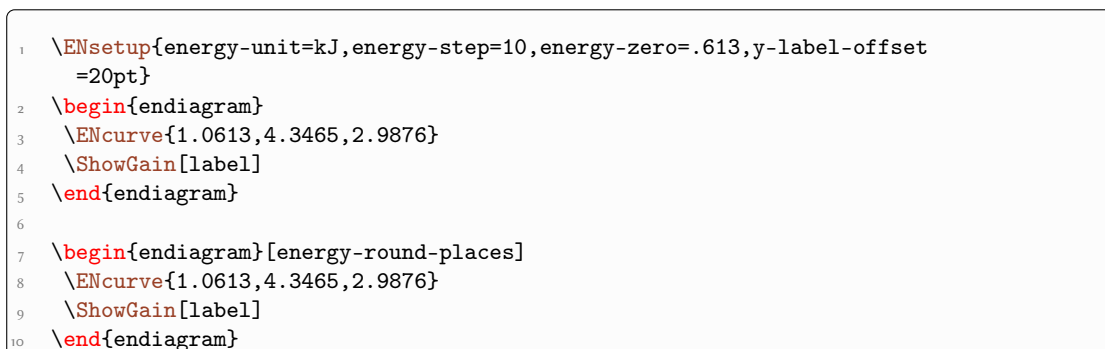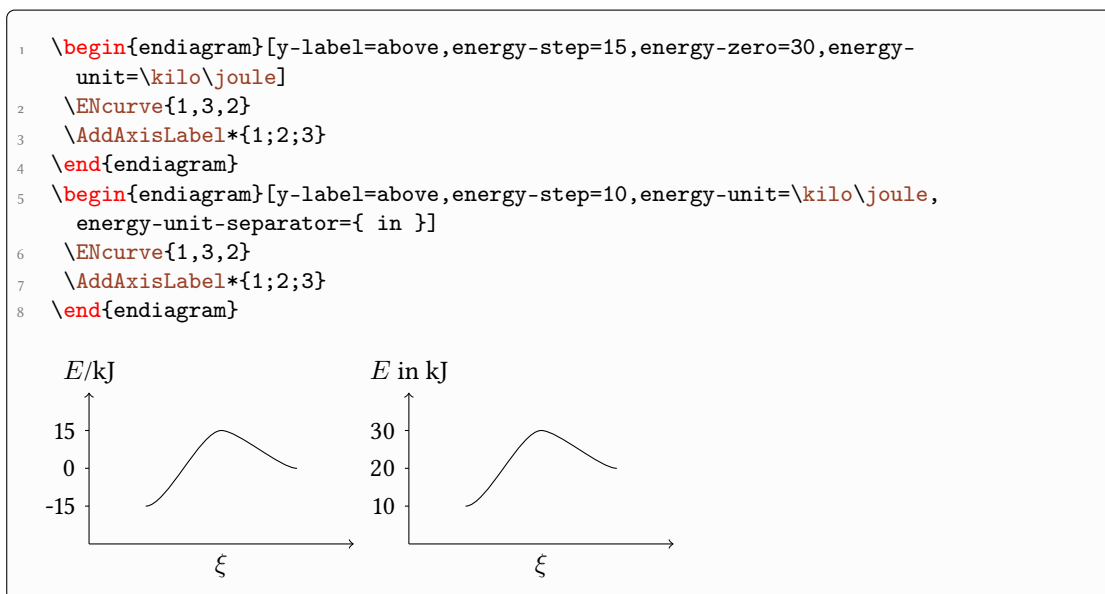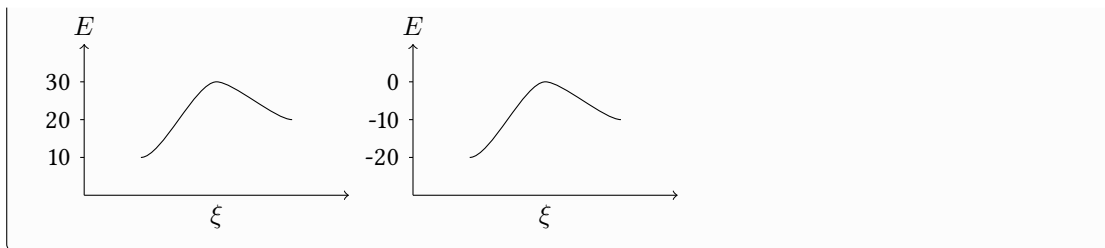

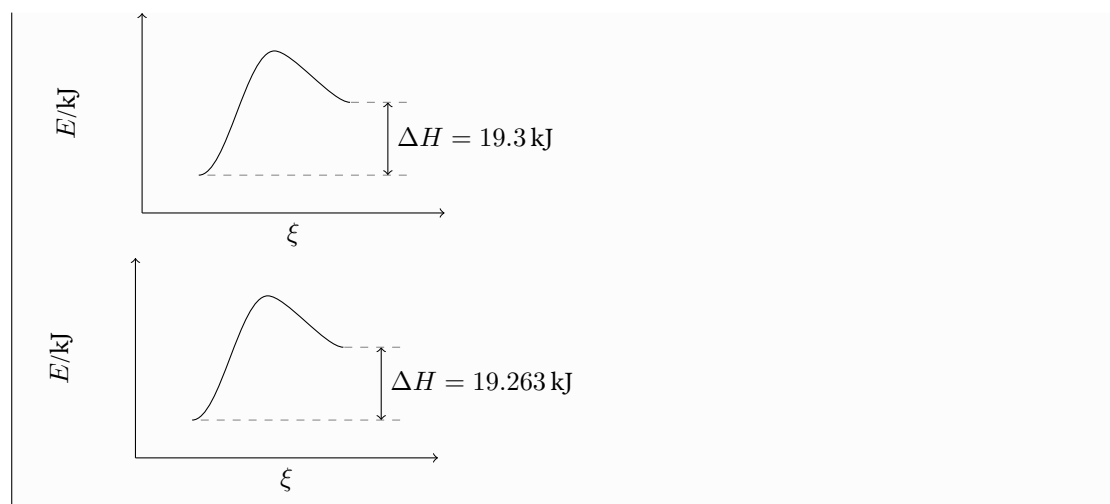


11.2 Impact on Other Commands

Using the option `energy-unit` changes the default labels of `\ShowGain` and `\ShowEa`. Now an actual value is shown:

```

1  % uses \DeclareSIUnit{\calory}{cal}
2  \sisetup{per-mode = fraction}
3  \ENsetup{
4    energy-step      = 100,
5    energy-unit      = \kilo\calory\per\mole,
6    energy-unit-separator = { in },
7    y-label          = above,
8    AddAxisLabel/font = \fontfamily{fxlf}\selectfont\footnotesize
9  }
10 \begin{endiagram}[scale=1.5]
11   \ENcurve{2.232,4.174,.308}
12   \AddAxisLabel*{0;1;2;3;4}
13   \ShowEa[label,connect={draw=none}]
14   \ShowGain[label]
15 \end{endiagram}


```

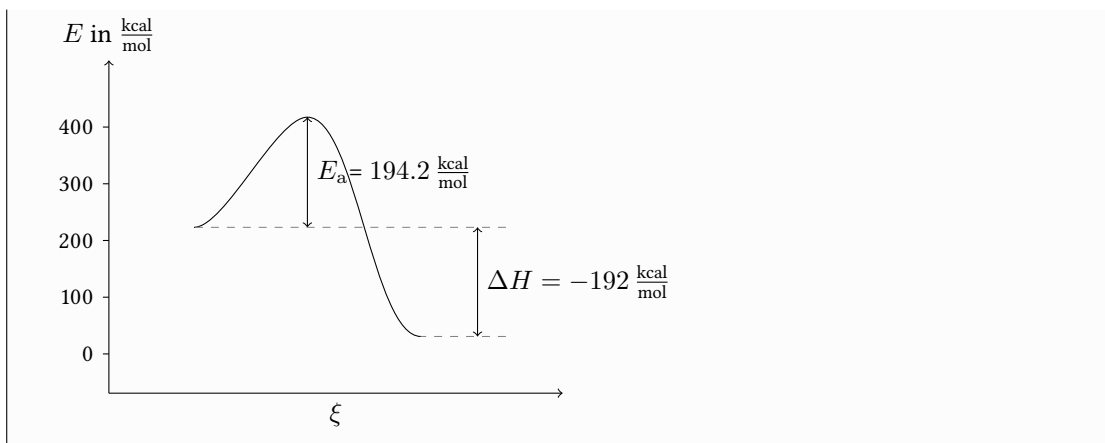This behaviour can be switched off, though:

► `calculate = true|false`

Default: true

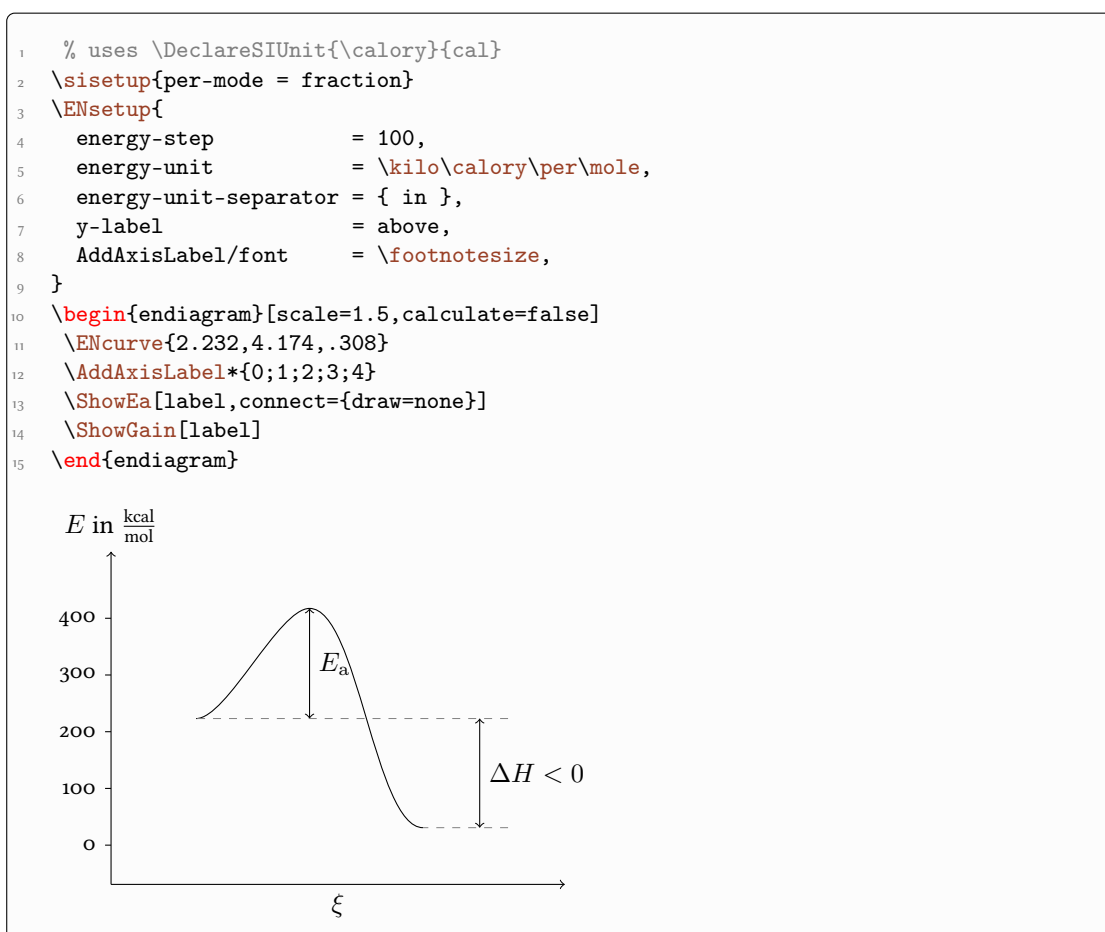

12 Example

The illustration of the Bell-Evans-Polanyi principle (figure 1) serves as an example for a more complex usage. One reaction is coloured as it an exception to the principle. The figure is a reproduction of a similar figure in [Brüo9].

```
1 % uses the packages 'chemmacros', 'chemfig' and 'libertine'
2 \begin{figure}[h]
3 \centering
4 \setatomsep{1.5em}
5 \DeclareChemIUPAC\iso{\textit{i}}
6 \chemsetup[chemformula]{font-family=fxl}
7 \ENsetup{
8   ENcurve/minima,
9   AddAxisLabel/font=\fontfamily{fxlf}\selectfont\footnotesize
10 }
11 \begin{endiagram}[
12   tikz = {yscale=1.5}, scale = 1.7,
13   y-label = above, y-label-text = $\Delta$ H$,
14   x-label = right, x-label-text = RK,
15   energy-step = 10]
16 \ENcurve{0,3.5,1}
17 \ENcurve[tikz=red]{0,3.7,.4}
18 \ENcurve{0,4.3[.2],2.4}
19 \ENcurve{0,4.7[.3],2.7}
20 \ENcurve{0,4.9[.35],2.9}
21 \ENcurve{0,5.2[.4],3.3}
22 \AddAxisLabel*{1;2;3;4;6}
23 \AddAxisLabel{(N1-1)[0];(N1-2)[35];(N2-2)[37];(N3-2)[43];(N4-2)
24 [47];(N5-2)[49];(N6-2)[52]}
25 \draw[right] (N1-3) ++ (1,0) node {\small \ch{2 "\chemfig
26 {=[:30]-[:60]\lewis{0.,}}~" + N2} } ;
27 \draw[right,red] (N2-3) ++ (1,-.3) node {\small \ch{2 "\chemfig
28 {[:60]*6(==(-\lewis{0.,})=)}~" + N2} } ;
29 \draw[right] (N3-3) ++ (1,-.2) node {\small \ch{2 "\tert-\lewis
30 {0.,Bu}~" + N2} } ;
31 \draw[right] (N4-3) ++ (1,-.1) node {\small \ch{2 "\iso-\lewis
32 {0.,Pr}~" + N2} } ;
33 \draw[right] (N5-3) ++ (1,0) node {\small \ch{2 "\lewis{0.,Et}~"
34 + N2} } ;
35 \draw[right] (N6-3) ++ (1,0) node {\small \ch{2 "\lewis{0.,Me}~"
36 + N2} } ;
37 \draw[above,font=\fontfamily{fxlf}\selectfont\footnotesize]
38 (N1-3) node {10} (N2-3) node[red] {4}
39 (N3-3) node {24} (N4-3) node {27}
40 (N5-3) node {29} (N6-3) node {33} ;
41 \end{endiagram}
42
43 \setatomsep{2em}
44 \schemestart
45 \chemfig{R-[:30]N=N-[:30]R}
46 \arrow{->[$\Delta$]}{,2.1}
```

```

40 \ch{2 "\lewis{0.,R}~" + N2}
41 \schemestop
42 \caption{\label{fig:bell-evans-polanyi}Enthalpie-Entwicklung
43 entlang
44 der Reaktionskoordinate bei einer Serie von Thermolysen
45 aliphatischer
46 Azoverbindungen. Alle Thermolysen dieser Serie -- mit Ausnahme der
47 farbig hervorgehobenen -- folgen dem Bell-Evans-Polanyi-Prinzip~\
48 cite{brueckner}.)}
49 \end{figure}

```

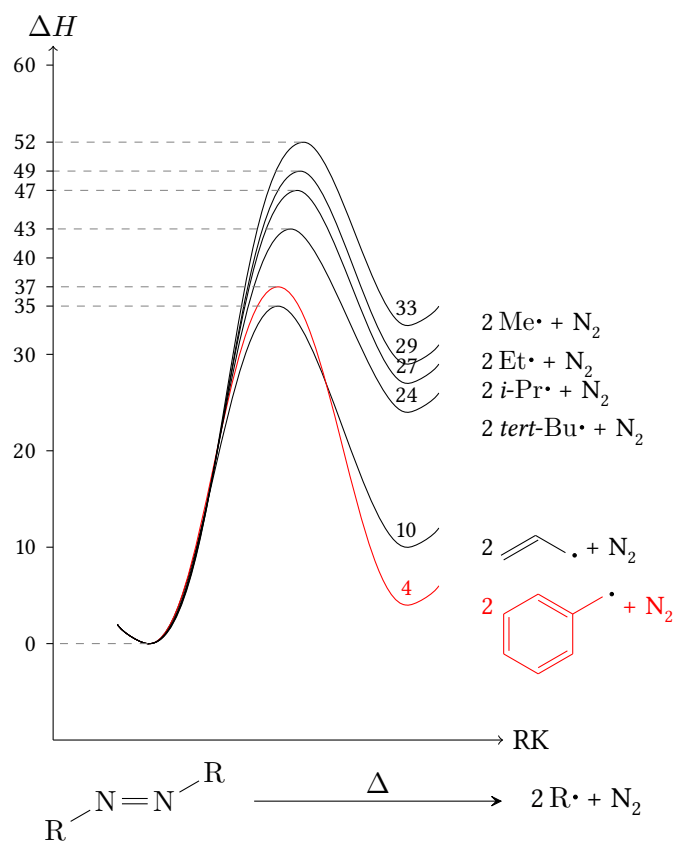


Figure 1: Enthalpie-Entwicklung entlang der Reaktionskoordinate bei einer Serie von Thermolysen aliphatischer Azoverbindungen. Alle Thermolysen dieser Serie – mit Ausnahme der farbig hervorgehobenen – folgen dem Bell-Evans-Polanyi-Prinzip [Brüo9].

References

- [Brüo9] Reinhard Brückner. *Reaktionsmechanismen*. 3. Auflage, 2. korrigierter Nachdruck. Springer-Verlag Berlin Heidelberg, 2009. ISBN: 978-3-8274-1579-0.
- [Tan] Till Tantau. *TikZ/pgf*. URL: <http://sourceforge.net/projects/pgf/> (visited on 01/31/2012).

Index

Section titles are indicated **bold**, packages sans serif, commands `\brown`, options `yellow` and modules `blue`.

A

activation energy 19–23
 debugging 22
Actual values 33
actual values 30
AddAxisLabel
 axis 29
 connect 29
 font 29
\AddAxisLabel 1, 27 f.
axes 9
axes 9–12
axes ticks and labels 27–30
axis 29

C

calculate 33
command
 option 2
\command 2 f.
connect 16, 22, 29
connect-from-line 16
curve 3–13
 axes 9
 debugging 12
 increment 6
 minima 8
 position 5
 scaling 4
 shape 8
 style 9

D

debug 12, 14, 19 f., 22, 26
debugging 12, 19, 22
draft 3, 12

E

ENcurve

looseness 8
minima 8
step 6
tikz 9

\ENcurve 1, 3 f., 7, 23
endiagram (env.) 2 f., 25 f.
energy-round 30
energy-round-places 30
energy-step 30
energy-unit 27, 30, 32
energy-unit-separator 30
energy-zero 30
energy gain 15–19
 debugging 19
\ENsetup 2
environment (env.) 2
Environments
 endiagram 2 f., 25 f.
 environment 2

F

final 12
font 29
from 20

L

l-offset 5
l3kernel 2
l3packages 2
label 16 f., 22
label-pos 16, 22
label-side 16, 22
label-tikz 16, 22
length 13 f.
levels 13
looseness 8

M

\MakeOrigin 26, 28
max 20
minima 8

N	
niveau	14
Niveaus	15
O	
offset	5 f., 16
option	2
origin	26
R	
r-offset	5 f.
S	
scale	4
several curves	23 ff.
shift	13 f.
ShowEa	
connect	22
from	20
label	22
label-pos	22
label-side	22
label-tikz	22
max	20
tikz	21
\ShowEa	1, 19, 23, 30, 32
ShowGain	
connect	16
connect-from-line	16
label	16
label-pos	16
label-side	16
label-tikz	16
offset	16
tikz	16
\ShowGain	1, 15 f., 18 f., 23, 30, 32
ShowNiveaus	
length	13
niveau	14
shift	13
tikz	13
\ShowNiveaus	1, 13, 16, 18 f., 23
siunitx	2, 30
step	6
T	
TikZ	2
ticks	27
ticks-step	27
TikZ	25
TikZ	2, 9, 13, 16, 21 f., 25 f., 28
tikz	9, 13, 16, 21, 26
U	
unit	4
X	
x-axis	9
x-label	9
x-label-angle	9
x-label-offset	9
x-label-pos	9
x-label-text	10
\xi	10
xparse	2
Y	
y-axis	9
y-label	9
y-label-angle	10
y-label-offset	9
y-label-pos	9
y-label-text	10